



WTC MACHINERY Diseñado para funcionar. Construido para durar.

WTC Machinery es líder mundial en el diseño y construcción de maquinaria y herramientas para instalaciones de reparación de equipos pesados.

FP150 Prensa de pin portátil

Descripción general

WTC Machinery rango medio FP150 La prensa de Pasadores Portátil una fuerza de prensado de hasta 150 toneladas, es una herramienta robusta capaz de realizar los trabajos más exigentes. Esta prensa de pasadores cuenta con un diseño de bastidor en C que facilita el mantenimiento de equipos de construcción o minería de mayor tamaño y es ideal para excavadoras y bulldozers de hasta Caterpillar D10, Komatsu PC800 y D275. Con un rango completa de herramientas, la prensa de pasadores FP150 puede dar servicio a cadenas de oruga con diámetros de pasadores que van desde 22 mm (0,87") hasta 69,8 mm (2,75").



La prensa FP150 está disponible sin bomba hidráulica, o ofrecemos varias bombas resistentes que se adaptan a la potencia de un taller o camión de servicio. Para mayor seguridad durante el uso, también ofrecemos un manómetro opcional, una eslinga de elevación (diseñada específicamente para esta prensa) y una manta de seguridad (para protegerla de posibles residuos proyectados).

Para proteger su inversión y mantener todo junto en un lugar conveniente, hay una caja o plataforma de viaje personalizada con cubierta para el almacenamiento y transporte seguro de su FP150 prensa, bomba y herramientas.



FP150 en Travel Skid



FP150 en
FP100-LS3



W1222 LINDEN ROAD, IXONIA, WISCONSIN 53036 USA

Phone: 800-248-8405 or 262-567-3993 • Fax: 262-567-4307 www.wtcmachinery.com

MANUFACTURERS/BENEFICIARY'S WARRANTY CERTIFICATE WTC MACHINERY, LLC WARRANTY

WTC MACHINERY, LLC warrants its products to be free from defects in material and workmanship under normal use and service for a period of twelve (12) months after date of shipment. WTC MACHINERY, LLC undertakes to be responsible for any defect that may arise due to faulty raw materials, design, workmanship and defective parts and to replace them without extra cost. Freight charges are the customer's responsibility. Our warranty is not transferable.

WTC MACHINERY, LLC shall have the option of requiring the return of all parts claimed defective. Parts proved to be defective, due to defect in workmanship and/or material, shall be either repaired or replaced free of charge, F.O.B. our designated factory. All parts warranty claims are subject to inspection by WTC MACHINERY, LLC and acceptance at the factory

Our warranty does not obligate us to bear the cost of labor or transportation charges in connection with the replacement or repair of defective parts and the removal and/or remounting of the parts repaired or replaced under this warranty, unless specifically authorized in writing by WTC MACHINERY, LLC. All parts returned to the factory must be shipped freight prepaid; no collect freight will be accepted by the factory. Forms authorizing such returns for inspection must accompany all returns.

This warranty shall not apply to products not manufactured by WTC MACHINERY, LLC.

Outside purchased equipment and accessories (not of WTC manufacture) are warranted only to the extent of the original equipment manufacturer's warranty and subject to their allowance to WTC MACHINERY, LLC. In this respect, our warranty obligations must conform and be limited to the warranty extended to WTC MACHINERY, LLC by its suppliers as extended to the customer.

We shall, in no event, be liable for consequential damages or contingent liability arising out of the failure of any unit or part to operate properly, or that is subject to:

- Ordinary operating wear, abuse, misuse, or overloading;
- Repairs or alterations by parties other than WTC MACHINERY, LLC;
- The use of improper fluids, contaminated fluids or improper filtering;
- The use of improper voltage hookup in the electrical connections of any equipment;
- Negligence, accident or damages due to deterioration during periods of storage by the purchaser prior to installation and operation;
- Damages occurred in shipment after leaving factory en route to customers' delivery point, as title to equipment passes to customer when loaded onboard for shipment, f.o.b. factory, and customer must place his own claim against damaged goods directly to the shipping company and not against WTC MACHINERY, LLC, its factory, or any of its personnel.
- Damages due to circumstances beyond the control of WTC MACHINERY, LLC and in connection with fulfilling any obligation under this warranty.

To the maximum extent permitted by applicable law, in no event shall WTC Machinery, LLC be liable for indirect, special, incidental or consequential damages resulting from personal injury, loss of business profits or business interruption from the use of its products, or from the inability to use its products.

This warranty is exclusive and is in lieu of all other expressed and implied warranties, including but not limited to implied warranties or merchantability and fitness for a particular purpose. WTC MACHINERY, LLC shall not be subject to any other obligations or liabilities whatsoever with respect to equipment manufactured or supplied by WTC MACHINERY, LLC, or services rendered to it.



SECCIÓN 2– FP150 Especificaciones de la Prensa Portátil

DIMENSIONES

Peso..... (Menos suministro de energía hidráulica) 975 lbs (445 kg)
Ancho 14.0" (0,36 m)
Altura 19.5" (0,50 m)
Longitud..... Posición de la espalda– 63.9" (1,62 m)
 Posición delantera– 55.9" (1,42 m)
 Guardado - 44.2" (1,12 m)

AMBIENTAL

Rango de temperatura de funcionamiento - -40 to 100 °F (-40 to 38 °C) (Consulte la página 5 para obtener recomendaciones de aceite hidráulico.)
 Condiciones de almacenamiento - 0 to 150 °F (-18 to 65 °C) Humedad sin condensación

CAPACIDAD DE PRENSADO

150 Toneladas cortas (136 toneladas)

RECORRIDO DEL CILINDRO HIDRÁULICO

Recorrido – 16.0" (406 mm) Diámetro interior – 6.12" (155 mm)

DIMENSIONES DE LA GARGANTA

Ancho – 16.5" (0,42 m) Profundidad – 4.5" (0,11 m)

MODELOS DE PISTAS

Caterpillar D10 & Abajo, Komatsu D275, PC800 & Abajo, & Todas las Pistas Comparables


FUENTES DE ENERGÍA HIDRÁULICA

Presión Máxima (todas las unidades)..... 10,000 p.s.i. (690 bar)

	Aire Comprimido	115V 60 Hz Eléctrico	220V 50 Hz Eléctrico *
FP150 Model	FP150A	FP150E	FP150-220-CE
Capacidad del Embalse	5 gal (18,9 l)	5 gal (18,9 l)	5 gal (18,9 l)
Flujo @ 150 psi (10,3 bar)	550 in ³ /min (9,0 lpm)	550 in ³ /min (9,0 lpm)	700 in ³ /min (11,5 lpm)
Flujo @ 10000 psi (690 bar)	59 in ³ /min (1,6 lpm)	39 in ³ /min (0,6 lpm)	60 in ³ /min (1,0 lpm)
Fuerza	4 Hp (3,0 kW)	1.6 Hp (1,2 kW)	1.7 Hp (1,3 kW)
Fuente de Alimentación	62 SCFM @ 100 psi 1,8 m ³ /min @ 6,9 bar	18 A @ 115 V 60Hz 1-Phase	9.6 A @ 220 V 50 Hz 1-Phase
Ancho	12" (0,30 m)	12.0" (0,30 m)	16.6" (0,42 m)
Longitud	25.8" (0,66 m)	25.8" (0,66 m)	24.0" (0,61 m)
Altura	12.3" (0,31 m)	20.0" (0,51 m)	18.3" (0,47 m)
Peso Seco	60 lb (20 kg)	90 lb (41 kg)	70 lb (32 kg)

*- Disponible También: 1.6 Hp (1,2 kW) 9.0 Amps, 220V 50/60Hz, 1 Phase (FP150-220)

ESPECIFICACIONES SUJETAS A CAMBIOS SIN PREVIO AVISO

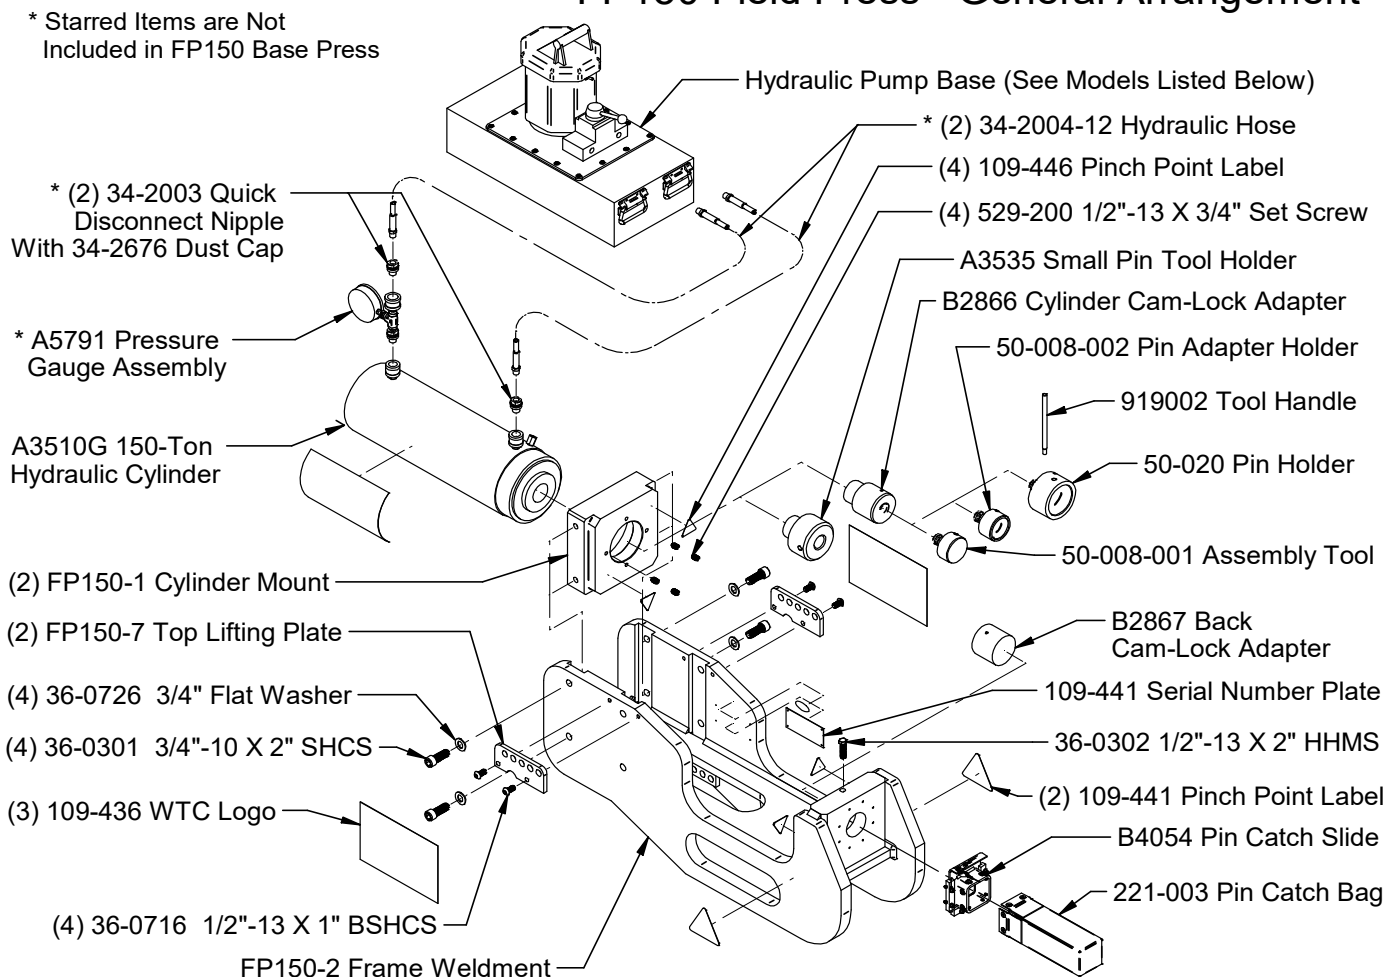IDENTIFICACIÓN DE LA PIEZA
FP150 Field Press - General Arrangement

LISTADO DE MODELOS

FP150***	FP150 con cilindro, sin piezas hidráulicas (bomba, mangueras y accesorios). – Base de bomba y mangueras hidráulicas suministradas por el cliente.
FP150E	FP150 con 115 V Bomba Eléctrica – Incluye 34-3102 Bomba Eléctrica 115V 60 Hz
FP150-220	FP150 con 220V 50/60Hz Bomba Eléctrica (Fuera de América del Norte) – Incluye 34-3103 Bomba Eléctrica 220V 50 Hz
FP150-220-CE***	FP150 con CE- Certificado 220V 50Hz Bomba Eléctrica (Unión Europea) – Incluye 34-2074 Bomba Eléctrica 220V 50 Hz CE-Marked
FP150A	FP150 con Bomba de Aire Comprimido – Incluye 34-3003MPP Bomba neumática

***Certificado**

SECTION 6 – FP150 Field Press Tooling



WARNING!

Only trained personnel familiar with operation should use the FP150.
Always make sure the FP150 tools are in good condition and centered on track components before pressing.
Use extra caution when track pins are worn at an angle. Tooling can slip and cause serious injury under high forces!
Always wear eye protection when operating the FP150.



CAUTION!

Track condition affects the disassembly force, and some track models may exceed the capacity of the FP150.
It is the operator's responsibility to determine whether the FP150 is adequate for a particular track.

The Tool Chart (starting on page 14) show the correct tooling for most crawler track models. For track models not listed, the drawing (below) shows the size ranges for Forcing Pins, Pin Adapters and Backing Bushing. See www.WTCmachinery.com for updated tool charts.

Item	Part No.	INCH	MM
1	A3536	0.87" to 1.25"	22,0 to 31,7
2	A3537	1.25" to 1.37"	31,7 to 34,9
3	B3635	1.37" to 1.87"	34,9 to 47,6
4	B3815	1.87" to 2.12"	47,6 to 53,8
5	B3608	2.12" to 2.50"	53,8 to 63,5
6	B3607	2.12" to 2.50"	53,8 to 63,5
7	B3631	2.50" to 3.00"	63,5 to 76,2
8	B3632	2.50" to 3.00"	63,5 to 76,2

Item	Part No.	INCH	MM
13	50-007-009	0.76" to 0.84"	19,5 to 21,4
14	50-007-008	0.84" to 0.94"	21,4 to 23,8
15	50-007-007	0.94" to 1.09"	23,8 to 27,7
16	50-007-006	1.09" to 1.22"	27,7 to 30,9
17	50-007-005	1.22" to 1.34"	30,9 to 34,1
18	50-007-004	1.34" to 1.47"	34,1 to 37,3
19	50-007-010	1.47" to 1.60"	37,3 to 40,7
20	50-007-003	1.60" to 1.72"	40,7 to 43,6
21	50-007-002	1.72" to 1.97"	43,6 to 50,0
22	50-007-001	1.97" to 2.22"	50,0 to 56,3
23	50-021-1	2.00" to 2.25"	50,8 to 57,1
24	50-021-2	2.25" to 2.50"	57,1 to 63,5
25	50-021-3	2.50" to 2.75"	63,5 to 69,9
26	50-021-4	2.75" to 3.00"	69,9 to 76,2

Part No.	INCH	MM
25503	0.75" to 0.90"	19 to 23
200281	0.90" to 1.17"	23 to 30
25498	1.17" to 1.30"	30 to 33
25499	1.30" to 1.42"	33 to 36
25500	1.42" to 1.55"	36 to 40
25547	1.55" to 1.67"	40 to 43
25548	1.67" to 1.80"	43 to 46
25551	1.80" to 2.04"	46 to 52
25501	2.04" to 2.29"	52 to 58
25553	Over 2.29"	Over 58

Item	Part No.	Description
27	*A3535	Small Pin Tool Holder
28	*B2866	Cylinder-Side Cam-Lock Adapter
29	*B2867	Backing Bar-Side Cam-Lock Adapter
30	*50-008-001	Pin Assembly Tool
31	*50-008-002	Pin Adapter Holder
32	*50-020	Large Track Pin Holder
33	915xxx	Pin Ass'y Tool (See Tooling Chart)


Item	Part No.	INCH	MM
9	A3539	1.31" Down	33,3 Down
10	A3540	1.31" to 1.81"	33,3 to 46,0
11	A3541	1.81" to 2.56"	46,0 to 65,0
12	A3541-001	2.56" to 2.87"	65,0 to 73,0

* Items Included With FP150

FP150 Tooling

Disassembling large track models - those with high pressing forces and long pin lengths - require pairs of Pin Tools. Use the short "Starter" Pin Tool to make the initial push, and then switch to the long "Finishing" Pin Tool to complete pressing out the pin.






CYLINDER-SIDE ADAPTERS
ALL MODELS

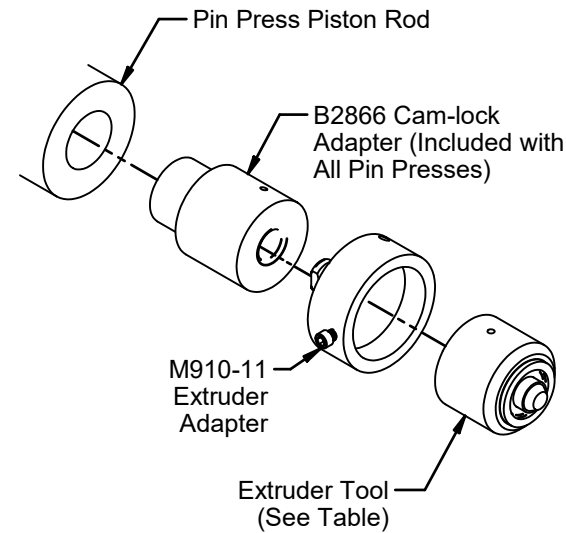


TRACK	CATERPILLAR PPR EXTRUDER TOOL	BERCO BPR2 EXTRUDER TOOL
D8N/R/T	M910-010	M910-010B
D9N/R/T	M910-1	M910-1B
D10 /N/R/T	M910-2*	M910-2B*
D11N/R/T	M910-3**	M910-3B**

Note: Extruder Tools Sold Individually - 2 Required


* - Exceeds FP100 Capacity
** - Exceeds FP100, FP150 and MPP150 Capacity

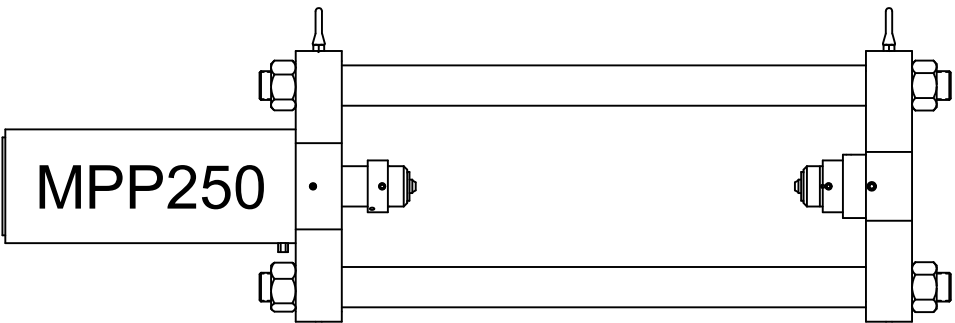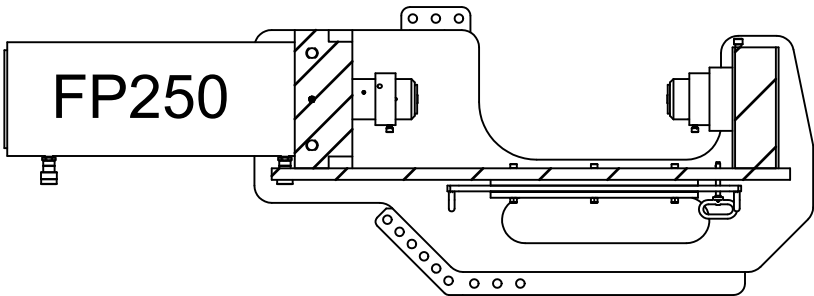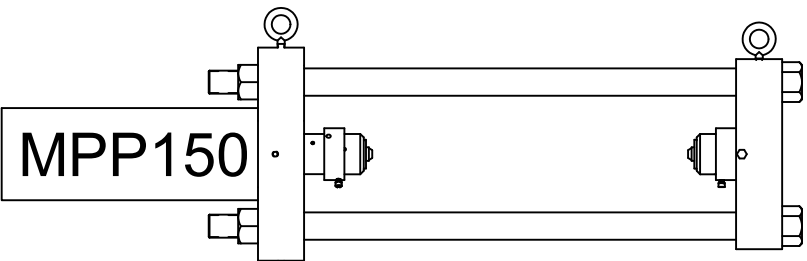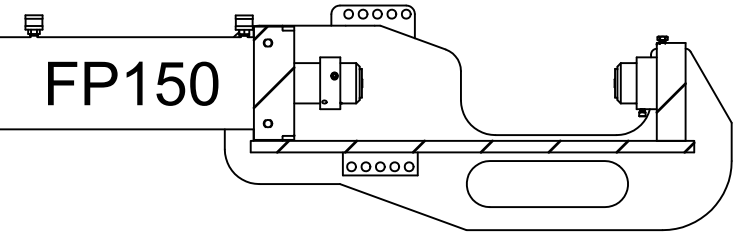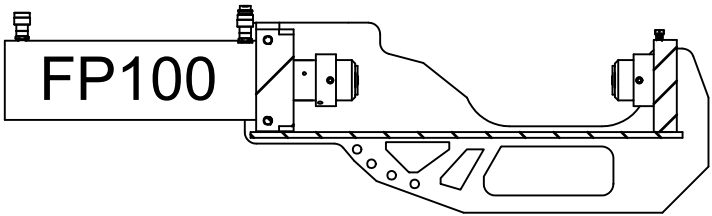

BACK-SIDE ADAPTERS
FP100, FP150, MPP150

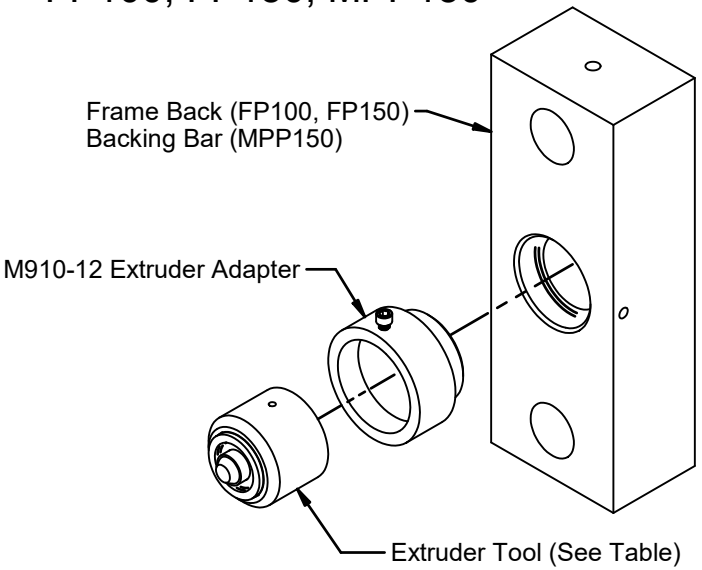

BACK-SIDE ADAPTERS
FP250, MPP250

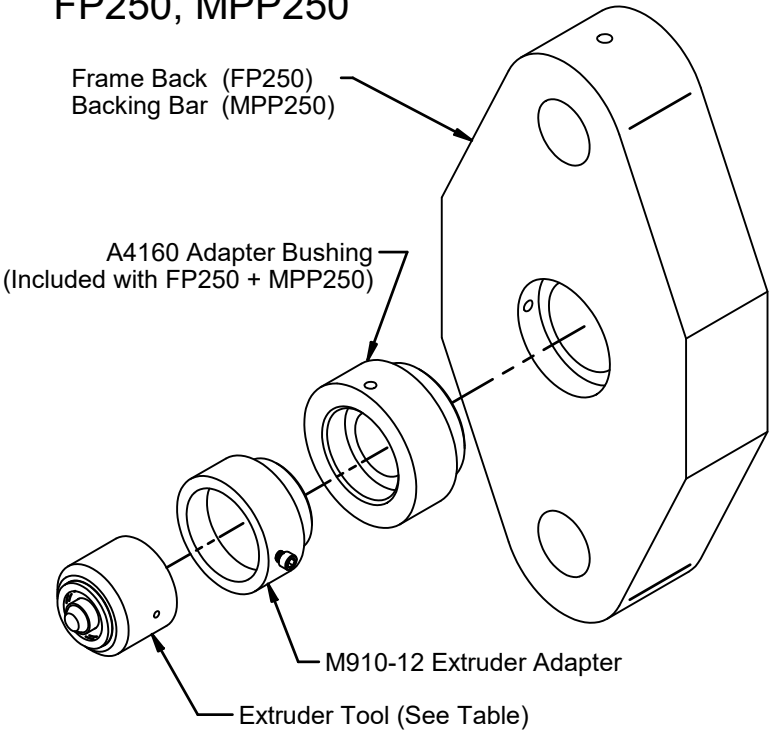

WTC Machinery, LLC
W1222 LINDEN ROAD
IXONIA, WISCONSIN 53036 USA

TOLERANCES UNLESS OTHERWISE SPECIFIED
FABRICATED DIMENSIONS +/- 1/16
FRACTIONAL DIMENSIONS +/- 1/64
DECIMAL DIMENSIONS +/- .010
INSIDE RADII 1/32
ANGULAR DIMENSIONS +/- 1/2
SURFACE FINISH 125

THIS DRAWING IS THE PROPERTY OF WTC MACHINERY LLC
DO NOT USE, DISTRIBUTE OR COPY WITHOUT EXPRESS PERMISSION

BREAK ALL SHARP EDGES
DO NOT SCALE DRAWING


NEXT ASSEMBLY
FP / MPP Portable Pin Presses

USED ON
Caterpillar PPR Track Chains

TITLE
Caterpillar PPR Tracks
Pin Press Extruder Tools and Adapters

SHEET	DATE	SIZE	DRAWING NUMBER	REV
DRAWN Solid Edge	22.05.10 WGT N/A	B	FP/MPP-ETA	A


CYLINDER-SIDE ADAPTERS - ALL MODELS

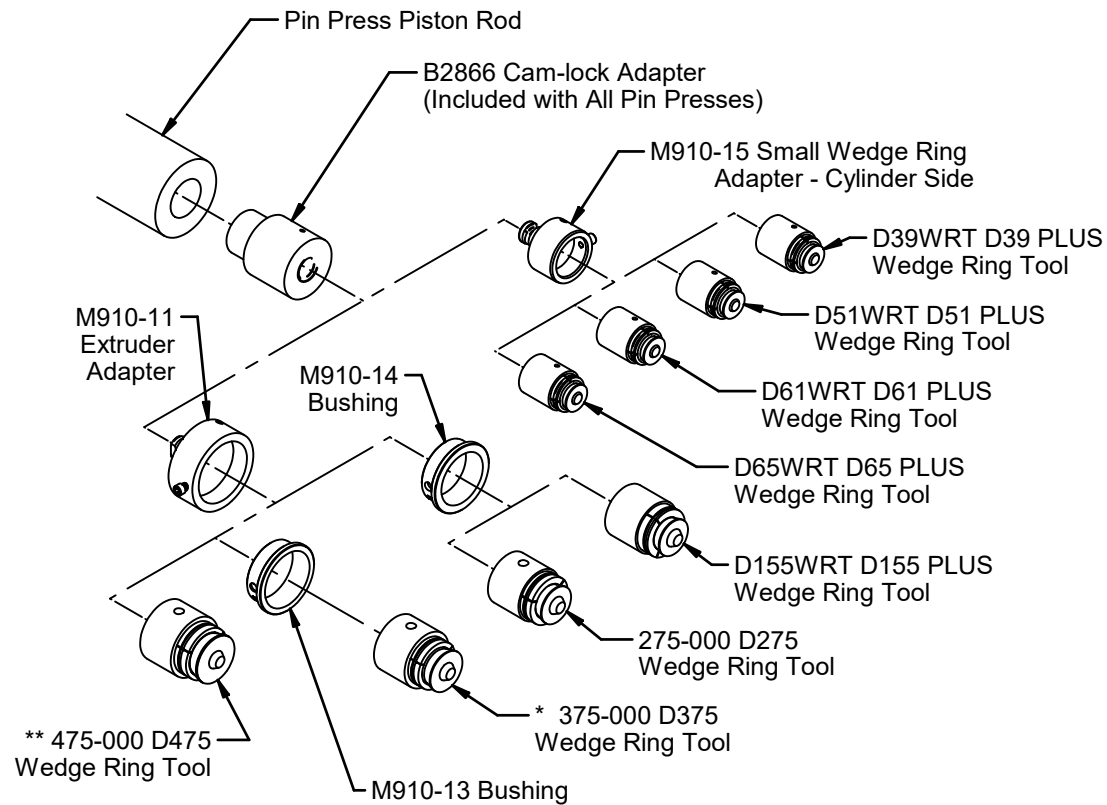


Note: Wedge Ring Tools Sold in Sets
Each set includes -
- one Large End Tool (Rubber Plug end)
- one Small End Tool (Plastic Plug end)

* Exceeds Capacity of FP100



** Exceeds Capacity of FP100, FP150 and MPP150

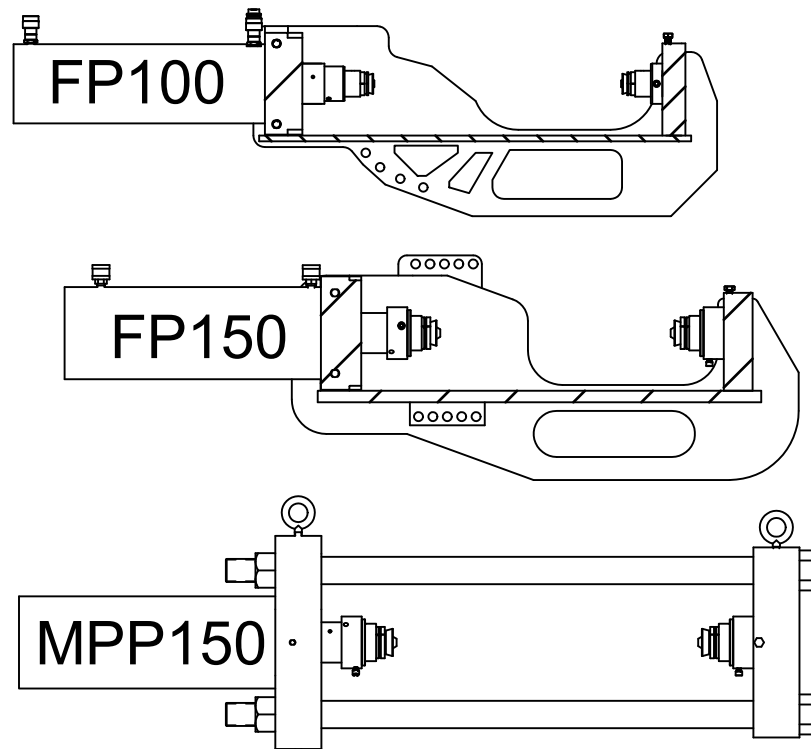

BACK-SIDE ADAPTERS - FP100, FP150, MPP150

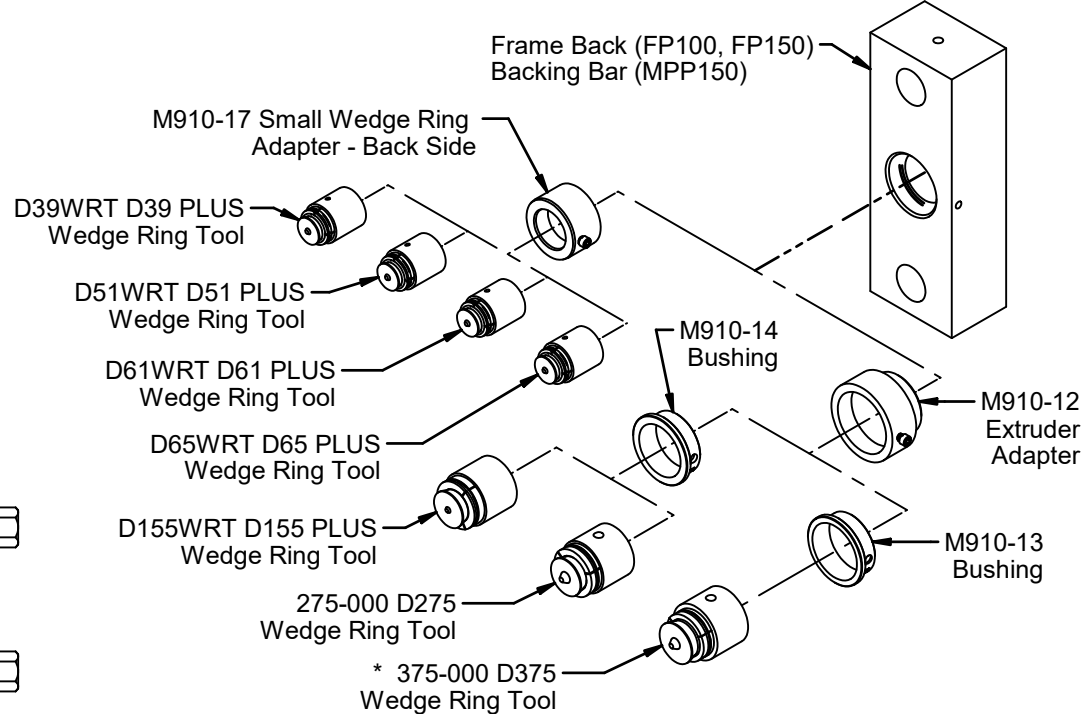

BACK-SIDE ADAPTERS - FP250, MPP250

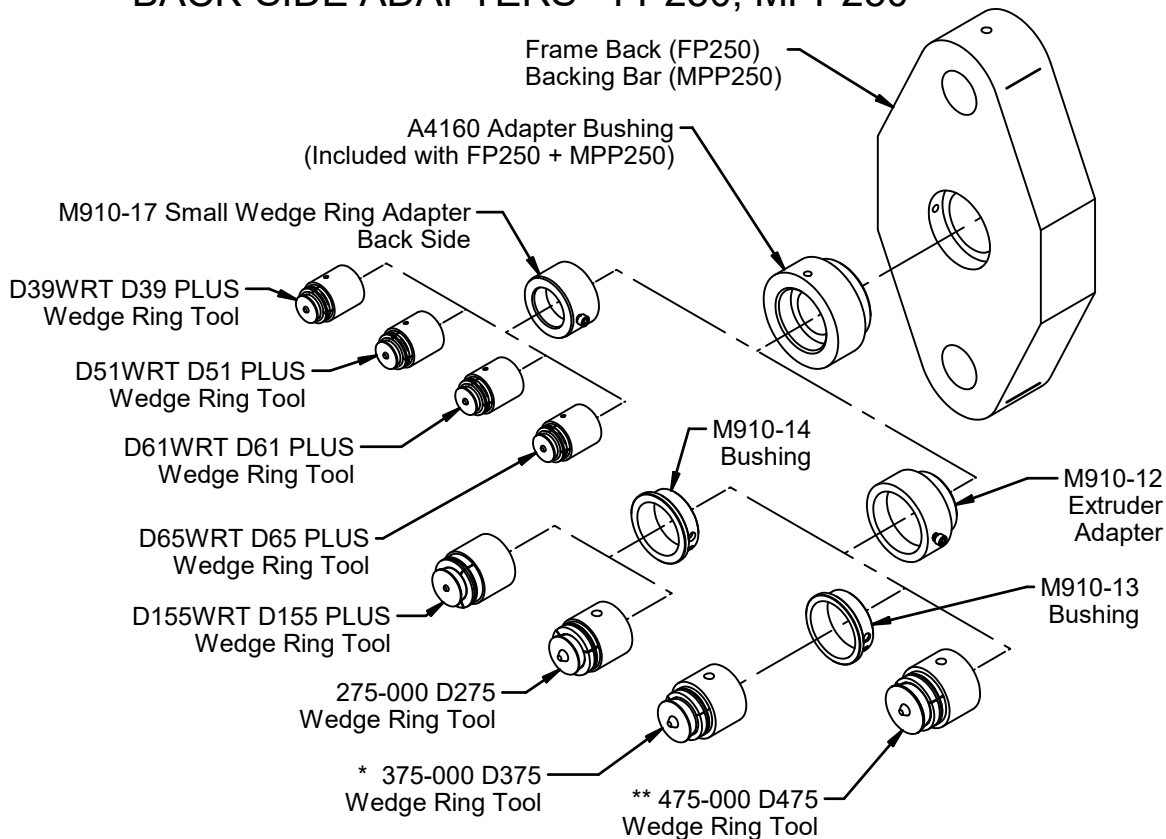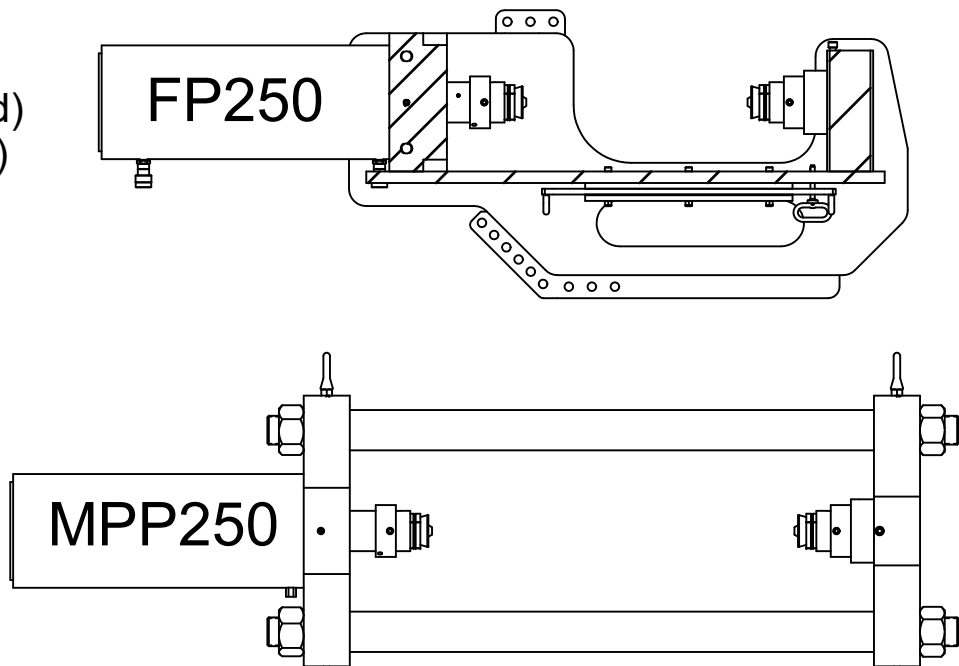

WTC Machinery, LLC

W1222 LINDEN ROAD
IXONIA, WISCONSIN 53036 USA

TOLERANCES UNLESS
OTHERWISE SPECIFIED

FABRICATED DIMENSIONS +/- 1/16
FRACTIONAL DIMENSIONS +/- 1/64
DECIMAL DIMENSIONS +/- .010
INSIDE RADII 1/32
ANGULAR DIMENSIONS +/- 1/2
SURFACE FINISH 125

THIS DRAWING IS THE PROPERTY OF
WTC MACHINERY LLC
DO NOT USE, DISTRIBUTE OR COPY
WITHOUT EXPRESS PERMISSION

BREAK ALL SHARP EDGES
DO NOT SCALE DRAWING

NEXT ASSEMBLY

FP / MPP Portable Pin Presses

USED ON

Komatsu Wedge Ring Track Chains

TITLE

**Komatsu Wedge Ring Tracks
Pin Press Wedge Ring Tools and Adapters**

SHEET

DATE

22.05.10

SIZE

B

DRAWING NUMBER

FP/MPP-WRTA

REV

A



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
AMER.AUGER	THT275	TRENCHER CHAIN		1.50	8.76	7.48	B3635	A3540	25500	50-008-002	50-007-010	915067
CASE	350		FLUSH	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915068
CASE	400		FLUSH	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915068
CASE	420		FLUSH	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915068
CASE	500		FLUSH	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915068
CASE	560		FLUSH	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915068
CASE	310G		FLUSH	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915068
CASE	350B		SEALED	0.99	5.22	5.88	A3536	A3539	200281	50-008-002	50-007-007	915224
CASE	450		SALT	1.06	5.38	5.88	A3536	A3539	200281	50-008-002	50-007-007	915225
CASE	600		SALT	1.06	5.38	5.88	A3536	A3539	200281	50-008-002	50-007-007	915225
CASE	550	JAK0013968 & DN	SEALED	1.13	6.46	6.00	A3536	A3539	200281	50-008-002	50-007-006	915066
CASE	450C		SEALED	1.13	6.46	6.00	A3536	A3539	200281	50-008-002	50-007-006	915066
CASE	450C		SALT	1.13	6.46	6.00	A3536	A3539	200281	50-008-002	50-007-006	915046
CASE	455C		SALT	1.13	6.46	6.00	A3536	A3539	200281	50-008-002	50-007-006	915046
CASE	550		SEALED	1.13	6.58	6.29	A3536	A3539	200281	50-008-002	50-007-006	915144
CASE	550		SALT	1.13	6.58	6.29	A3536	A3539	200281	50-008-002	50-007-006	915144
CASE	550E		SEALED	1.13	6.58	6.29	A3536	A3539	200281	50-008-002	50-007-006	915144
CASE	550E		SALT	1.13	6.58	6.29	A3536	A3539	200281	50-008-002	50-007-006	915144
CASE	550G	Floating Bushing	SEALED	1.13	6.58	6.29	A3536	A3539	200281	50-008-002	50-007-006	915144
CASE	450		FLUSH	1.19	5.38	5.75	A3536	A3539	25498	50-008-002	50-007-006	915066
CASE	700	S/N 7070351 & DN	RECESSED	1.25	6.50	6.25	A3536	A3539	25498	50-008-002	50-007-005	915056
CASE	800		RECESSED	1.25	6.50	6.25	A3536	A3539	25498	50-008-002	50-007-005	915056
CASE	1000		RECESSED	1.25	6.50	6.25	A3536	A3539	25498	50-008-002	50-007-005	915056
CASE	450A	S/N 3030801 & UP	SEALED	1.25	6.54	6.00	A3537	A3539	25498	50-008-002	50-007-005	915069
CASE	450B		SEALED	1.25	6.54	6.00	A3537	A3539	25498	50-008-002	50-007-005	915069
CASE	850D		SALT	1.32	7.22	6.25	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	855D		SALT	1.32	7.22	6.25	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	650		SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	650		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	850D		SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	850D		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	850E	AFTER 4-1-89	SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	850E	AFTER 4-1-89	SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	850G		SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	850G		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	850H		SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	850H		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	850K		SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	850K		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	855D	AFTER 4-1-89	SEALED	1.32	7.22	6.73	A3537	A3540	25499	50-008-002	50-007-005	915011
CASE	855D	AFTER 4-1-89	SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915158
CASE	750		RECESSED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915069
CASE	850		SEALED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915009
CASE	1000	HD	RECESSED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915069
CASE	1000		SEALED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915009
CASE	1150		RECESSED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915069
CASE	1150		SEALED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915011
CASE	850B		SEALED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915009
CASE	850D		SEALED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915011
CASE	855D		SEALED	1.38	6.94	6.25	B3635	A3540	25499	50-008-002	50-007-004	915011
CASE	1150D	7310051 & PRIOR	SEALED	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1150D	7310051 & PRIOR	SALT	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1150E		SEALED	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1150E		SALT	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1155D	7311001 & PRIOR	SEALED	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
CASE	1155D	7311001 & PRIOR	SALT	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1155E		SALT	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1155E		SEALED	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915052
CASE	1150B		SEALED	1.50	8.10	6.68	B3635	A3540	25500	50-008-002	50-007-010	915067
CASE	1450		SEALED	1.75	9.08	8.02	B3635	A3540	25548	50-008-002	50-007-002	915070
CASE	1450B		SEALED	1.75	9.08	8.02	B3635	A3540	25548	50-008-002	50-007-002	915070
CASE	1455B		SEALED	1.75	9.08	8.02	B3635	A3540	25548	50-008-002	50-007-002	915070
CASE	1550		SEALED	1.75	9.06	8.02	B3635	A3540	25548	50-008-002	50-007-002	915226
CASE	1550		SALT	1.75	9.06	8.02	B3635	A3540	25548	50-008-002	50-007-002	915006
CASE	1450B	S/N 8383001 & UP	SEALED	1.75	9.06	8.02	B3635	A3540	25548	50-008-002	50-007-002	915226
CASE	1450B		SALT	1.75	9.06	8.02	B3635	A3540	25548	50-008-002	50-007-002	915006
CASE	1455B	S/N 8480001 & UP	SEALED	1.75	9.06	8.02	B3635	A3540	25548	50-008-002	50-007-002	915226
CASE	1455B		SALT	1.75	9.06	8.02	B3635	A3540	25548	50-008-002	50-007-002	915006
CAT	307C		GREASE	0.94	5.15	6.06	A3536	A3539	200281	50-008-002	50-007-007	915169
CAT	308	Mini EXC	GREASE	0.95	5.16	6.10	A3536	A3539	200281	50-008-002	50-007-007	915281
CAT	E70B		SEALED	0.95	5.51	5.32	A3536	A3539	200281	50-008-002	50-007-007	915129
CAT	E70		SEALED	0.95	5.51	5.32	A3536	A3539	200281	50-008-002	50-007-007	915129
CAT	299D	Berco BC2428	SALT	1.04	5.80	5.51	A3536	A3539	200281	50-008-002	50-007-007	915044
CAT	D2		SEALED	1.13	6.18	6.13	A3536	A3539	200281	50-008-002	50-007-006	915040
CAT	931		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	933		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	935B		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	935C		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D3		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D3B		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D3C		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D3G		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D3K		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D4B		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D4C		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D4G		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D4K		SALT	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915082
CAT	D2		RECESS	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	916040
CAT	R2-15-22		RECESS	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	916040
CAT	931		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	933		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	935B		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	AP1050		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	D3		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	D3B		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	D3G		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	D4B		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	D4C		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	D4G		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	PR450		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	SF350		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	TR225		SEALED	1.13	6.16	6.13	A3536	A3539	200281	50-008-002	50-007-006	915004
CAT	225		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	227		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	229		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	235	EXC	SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	955		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	231D		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	D6C		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	D6D		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
CAT	FB227		SEALED	1.25	9.06	7.98	A3537	A3539	25498	50-008-002	50-007-005	915003
CAT	D4K2		SALT	1.13	6.14	6.25	A3536	A3539	200281	50-008-002	50-007-006	915065
CAT	30		RECESS	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	941	w/ 9/16 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915002
CAT	D4		RECESS	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	D4		SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915002
CAT	D4	w/ 1/2 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915137
CAT	D4	w/ 9/16 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915137
CAT	D4C	w/ 1/2 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915137
CAT	D4C	w/ 9/16 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915137
CAT	D4D		SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915002
CAT	D4D	w/ 1/2 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915137
CAT	D4D	w/ 9/16 BOLT	SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915137
CAT	R4		RECESS	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	215	w/ 5/8 BOLT	SEALED	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	225	EXC	SEALED	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	941	w/ 5/8 BOLT	SEALED	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	941		SALT	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915052
CAT	943	HI RAIL	SALT	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915052
CAT	D4		SALT	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915052
CAT	D4D		SEALED	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915011
CAT	D4D		SALT	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915052
CAT	D4E		SALT	1.31	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915052
CAT	215	w/ 9/16 BOLT	SEALED	1.32	6.37	6.74	A3537	A3540	25499	50-008-002	50-007-005	915089
CAT	943	HI RAIL	SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915002
CAT	D4H		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915124
CAT	D4H	LGP	PPR	1.32	7.29	6.74	A3537	A3540	25499	50-008-002	50-007-005	915247
CAT	939		SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	561H		SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	D4H		SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	D4H	TSK CUS SKD	SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	D5C		SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	D5G		SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	D5G	XL	SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	D5K		SALT	1.32	7.54	6.74	A3537	A3540	25499	50-008-002	50-007-005	915149
CAT	E110B		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	E120B		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	D4	Berco	UNSEALED	1.32	7.22	6.75	A3537	A3540	25499	50-008-002	50-007-005	915050
CAT	312C	EXC	GREASE	1.32	7.00	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	311	EXC	SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	312	EXC	SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	313B	EXC	SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	314B	EXC	SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915059
CAT	561H	HD	SALT	1.42	8.45	6.74	B3635	A3540	25499	50-008-002	50-007-004	915145
CAT	D4H	HD	SALT	1.42	8.45	6.74	B3635	A3540	25499	50-008-002	50-007-004	915145
CAT	D5M		SALT	1.42	8.45	6.74	B3635	A3540	25499	50-008-002	50-007-004	915145
CAT	D5N		SALT	1.42	8.45	6.74	B3635	A3540	25499	50-008-002	50-007-004	915145
CAT	E180		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915128
CAT	EL180		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915128
CAT	MHI 180-8		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915128
CAT	MHI 180-8LC		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915128
CAT	953	HYBRID	SALT	1.44	8.10	7.48	B3635	A3540	25500	50-008-002	50-007-004	915278
CAT	219		SEALED	1.44	8.12	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	951		SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	953		SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
CAT	953	HI RAIL	SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	953	LGP	SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	215A		SEALED	1.44	8.12	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	225B	EXC	SEALED	1.44	8.12	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	225C	EXC	SEALED	1.44	8.12	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	953C		SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915242
CAT	953K	Conventional Track	SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915242
CAT	D5		SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	D5	PRO	SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	D5B		SALT	1.44	8.12	6.91	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	561	PIPELAYER	SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	951		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	955	HD	SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	977		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	951B		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	951B		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	951C		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	955K		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	977	OPT FORMER	SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	D5		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	D5B		SEALED	1.44	8.13	6.91	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	D6		RECESS	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915014
CAT	D6		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	D6B		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
CAT	315	EXC	SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915140
CAT	315B	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915236
CAT	315C	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	315L	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915003
CAT	317	EXC	SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915140
CAT	318C	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	320	EXC	SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915140
CAT	320B	EXC	SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915140
CAT	320C	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	320D	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	320EL	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	320L	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	322	EXC	SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915140
CAT	322B	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915236
CAT	322C	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	324D	EXC	GREASE	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915170
CAT	D5H		SALT	1.44	8.12	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	D5H	TSK CUS SKD	SALT	1.44	8.18	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
CAT	E200B		SEALED	1.45	8.15	7.50	B3635	A3540	25500	50-008-002	50-007-004	915133
CAT	E240		SEALED	1.45	8.15	7.50	B3635	A3540	25500	50-008-002	50-007-004	915133
CAT	EL200B		SEALED	1.45	8.15	7.50	B3635	A3540	25500	50-008-002	50-007-004	915133
CAT	EL240		SEALED	1.45	8.15	7.50	B3635	A3540	25500	50-008-002	50-007-004	915133
CAT	D5H	HD	SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915145
CAT	D6K2		SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915145
CAT	D6M		SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915145
CAT	D6N		SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915145
CAT	D6M	PPR2	SALT	1.50	8.95	7.48	B3635	A3540	25500	50-008-002	50-007-010	915335
CAT	D6N	PPR2	SALT	1.50	8.95	7.48	B3635	A3540	25500	50-008-002	50-007-010	915335
CAT	329	EXC	GREASE	1.65	9.00	8.00	B3635	A3540	25547	50-008-002	50-007-003	915275
CAT	325C	EXC	GREASE	1.65	9.05	7.99	B3635	A3540	25547	50-008-002	50-007-003	915141
CAT	325	EXC	SEALED	1.65	9.06	8.00	B3635	A3540	25547	50-008-002	50-007-003	915141



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
CAT	325BL	EXC	SEALED	1.65	9.06	8.00	B3635	A3540	25547	50-008-002	50-007-003	915141
CAT	D6 / XE	HDXL	PPR2	1.73	9.88	8.00	B3635	A3540	25548	50-008-002	50-007-002	915326
CAT	235-6	EXC	SEALED	1.75	9.06	8.00	B3635	A3540	25548	50-008-002	50-007-002	915237
CAT	336	EXC	SEALED	1.75	9.63	8.50	B3635	A3540	25548	50-008-002	50-007-002	915020
CAT	E300B		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
CAT	EL300A		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
CAT	EL300B		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
CAT	EL300B		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915038
CAT	MHI 300LC-8		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
CAT	225		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	227		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	229		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	231D		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	235	EXC	SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	955		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915205
CAT	D6C		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6D		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6	ITR UL202C3F00	SALT	1.75	9.06	8.00	B3635	A3540	25548	50-008-002	50-007-002	915344
CAT	FB227		SEALED	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	571		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	572		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	17A		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	977K		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	D7		RECESS	1.75	9.88	7.99	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	D7		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	D7C		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	D7D		RECESS	1.75	9.88	7.99	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	D7D		SEALED	1.75	9.88	7.98	B3635	A3540	25548	50-008-002	50-007-002	915012
CAT	583		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	14A		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	D8		RECESS	1.75	11.44	7.95	B3635	A3540	25548	50-008-002	50-007-002	915206
CAT	D8		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	D8D		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	D8E		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	D8F		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	D8G		SEALED	1.75	11.44	7.99	B3635	A3540	25548	50-008-002	50-007-002	915013
CAT	955		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	963		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	963	HI RAIL	SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	963	Berco	SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915081
CAT	D6C		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6D		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6E		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915003
CAT	D6H	LGP	SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915081
CAT	D6H		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915081
CAT	D6H	LGP	PPR	1.75	9.15	7.98	B3635	A3540	25548	50-008-002	50-007-002	915143
CAT	D6H	HD	SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915143
CAT	D6R		SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915143
CAT	D6T		SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915143
CAT	D6T	PPR2	SALT	1.75	10.32	7.98	B3635	A3540	25548	50-008-002	50-007-002	915337
CAT	D7	Berco	SEALED	1.76	9.90	7.98	B3635	A3540	25548	50-008-002	50-007-002	
CAT	336NGH	EXC	SEALED	1.81	8.25	8.50	B3635	A3540	25551	50-008-002	50-007-002	915336
CAT	330	EXC	SEALED	1.81	9.67	8.50	B3635	A3541	25551	50-008-002	50-007-002	915015



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
CAT	330B	EXC	SEALED	1.81	9.67	8.50	B3635	A3541	25551	50-008-002	50-007-002	915015
CAT	330B	EXC	GREASE	1.81	9.67	8.50	B3635	A3541	25551	50-008-002	50-007-002	915185
CAT	330C	EXC	SEALED	1.81	9.67	8.50	B3635	A3541	25551	50-008-002	50-007-002	915015
CAT	336EL	EXC	GREASE	1.81	9.67	8.50	B3635	A3541	25551	50-008-002	50-007-002	915015
CAT	345CL		GREASE	1.81	9.84	7.85	B3635	A3541	25551	50-008-002	50-007-002	915263
CAT	E450		UNSEALED	1.87	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915038
CAT	349F	EXC	PPR2	1.88	9.81	8.50	B3815	A3541	25551	50-008-002	50-007-002	915017
CAT	235		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	572		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	973		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	973	HI RAIL	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	973	LGP	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	973		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	977		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	977		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	345B		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	349E		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915055
CAT	571A		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	571A		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D7		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D7E	1970's Non Electric	SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	D7E	1970's Non Electric	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D7F		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	D7F		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D7G		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
CAT	D7G		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D7G	LGP	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	345B	EXC	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915200
CAT	345BL	EXC	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915200
CAT	578		PPR	1.88	9.65	8.50	B3815	A3541	25551	50-008-002	50-007-002	915207
CAT	D8N		PPR	1.88	9.65	8.50	B3815	A3541	25551	50-008-002	50-007-002	915207
CAT	D8R		PPR	1.88	9.65	8.50	B3815	A3541	25551	50-008-002	50-007-002	915207
CAT	D8T		PPR	1.88	9.65	8.50	B3815	A3541	25551	50-008-002	50-007-002	915207
CAT	D8XL			1.88	9.65	8.50	B3815	A3541	25551	50-008-002	50-007-002	915207
CAT	D8 HD XL	Links 502-6149 / 6150		1.88	9.65	8.59	B3815	A3541	25551	50-008-002	50-007-002	915207
CAT	973	HI RAIL	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915201
CAT	D7H		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915103
CAT	D7H	LGP	PPR	1.88	9.93	8.50	B3815	A3541	25551	50-008-002	50-007-002	915007
CAT	D7H	HD	SALT	1.88	10.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915150
CAT	D7R		SALT	1.88	10.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915150
CAT	D7E	Electric Drive	SALT	1.88	10.89	8.50	B3815	A3541	25551	50-008-002	50-007-002	915150
CAT	D7E / H / R	HDXL	PPR2	1.88	10.42	8.50	B3815	A3541	25551	50-008-002	50-007-002	915327
CAT	578	PIPELAYER	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	583R	PIPELAYER	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D8	TREK TRACK	SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D8L		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D8N		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D8R		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D8T		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
CAT	D9N		PPR	2.00	10.44	9.45	B3815	A3541	25551	50-008-002	50-007-001	915253
CAT	D9R		PPR	2.00	10.44	9.45	B3815	A3541	25551	50-008-002	50-007-001	915253
CAT	D9T		PPR	2.00	10.44	9.45	B3815	A3541	25551	50-008-002	50-007-001	915253
CAT	589		PPR	2.00	10.77	9.00	B3815	A3541	25551	50-008-002	50-007-001	915064
CAT	D9L		PPR	2.00	10.77	9.00	B3815	A3541	25551	50-008-002	50-007-001	915064
CAT	D9T	Berco BPRZ (CR7611)	SALT	2.00	11.26	9.45	B3815	A3541	25551	50-008-002	50-007-001	915253



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
CAT	589	PIPELAYER	SALT	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915093
CAT	D9L		SALT	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915093
CAT	983		SALT	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915007
CAT	D8		SALT	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915007
CAT	D8H		SALT	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915007
CAT	D8K		SALT	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915007
CAT	D9		SEALED	2.00	12.00	9.00	B3815	A3541	25551	50-008-002	50-007-001	915208
CAT	D9N		SALT	2.00	10.98	9.45	B3815	A3541	25551	50-008-002	50-007-001	915092
CAT	D9R		SALT	2.00	10.98	9.45	B3815	A3541	25551	50-008-002	50-007-001	915092
CAT	D9T		SALT	2.00	10.98	9.45	B3815	A3541	25551	50-008-002	50-007-001	915092
CAT	345	EXC	SEALED	2.00	11.44	8.50	B3815	A3541	25551	50-008-002	50-007-001	915142
CAT	350		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
CAT	983		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
CAT	235D		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
CAT	245S		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
CAT	D8H		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
CAT	D8K		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
CAT	245	Berco	SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	
CAT	D8H	ITM		2.00	11.50	9.00	B3815	A3541	25551	50-008-002	50-007-001	
CAT	390	EXC	SEALED	2.17	12.40	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915284
CAT	D10		PPR	2.25	11.97	10.25	B3607/8	A3541	25501	50-020	50-021-2	915240
CAT	594		SEALED	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915005
CAT	D9		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915008
CAT	D9D		SEALED	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915005
CAT	D9E		SEALED	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915005
CAT	D9G		SEALED	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915005
CAT	D9G		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915008
CAT	D9H		SEALED	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915005
CAT	D9H		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915008
CAT	245	EXC	SEALED	2.25	11.26	10.25	B3607/8	A3541	25501	50-020	50-021-2	915005
CAT	D10N		PPR	2.25	11.97	10.25	B3607/8	A3541	25501	50-020	50-021-2	915246
CAT	D10R		PPR	2.25	11.97	10.25	B3607/8	A3541	25501	50-020	50-021-2	915246
CAT	D10N	ITM	PPR	2.25	11.97	10.25	B3607/8	A3541	25501	50-020	50-021-2	915351
CAT	365	EXC	SEALED	2.25	12.24	10.25	B3607/8	A3541	25501	50-020	50-021-2	915139
CAT	375	EXC	SEALED	2.25	12.24	10.25	B3607/8	A3541	25501	50-020	50-021-2	915139
CAT	5080		SEALED	2.25	12.24	10.25	B3607/8	A3541	25501	50-020	50-021-2	915139
CAT	365BL	EXC	SEALED	2.25	12.24	10.25	B3607/8	A3541	25501	50-020	50-021-2	915139
CAT	D10		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915063
CAT	D10N		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915104
CAT	D10R		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915104
CAT	D10T		SALT	2.25	12.25	10.25	B3607/8	A3541	25501	50-020	50-021-2	915104
CAT	385B	EXC	SEALED	2.25	13.19	10.25	B3607/8	A3541	25501	50-020	50-021-2	915168
CAT	D11		SALT	2.63	13.81	12.50	B3631/2	A3541-001	25553	50-020	50-021-3	915202
CAT	D11R	ITR Snap Ring	IPR	2.63	13.81	12.50	B3631/2	A3541-001	25553	50-020	50-021-3	152031TM
CAT	D11N		PPR	2.63	13.81	12.50	B3631/2	A3541-001	25553	50-020	50-021-3	915203
CAT	D11R		PPR	2.63	13.81	12.50	B3631/2	A3541-001	25553	50-020	50-021-3	915203
CAT	D11T		PPR	2.63	13.81	12.50	B3631/2	A3541-001	25553	50-020	50-021-3	915203
DRESSER	T340		FLUSH	1.01	4.75	6.00	A3536	A3539	200281	50-008-002	50-007-007	915028
DRESSER	T5		FLUSH	1.01	4.75	6.00	A3536	A3539	200281	50-008-002	50-007-007	915028
DRESSER	TD4		FLUSH	1.01	4.75	6.00	A3536	A3539	200281	50-008-002	50-007-007	915028
DRESSER	TD5		FLUSH	1.01	4.75	6.00	A3536	A3539	200281	50-008-002	50-007-007	915028
DRESSER	500E		UNSEALED	1.13	5.30	5.99	A3536	A3539	200281	50-008-002	50-007-006	915209
DRESSER	500		RECESSED	1.13	5.36	6.00	A3536	A3539	200281	50-008-002	50-007-006	915044
DRESSER	100B		SEALED	1.25	5.97	6.00	A3537	A3539	25498	50-008-002	50-007-005	915034
DRESSER	T6		SEALED	1.25	5.97	6.00	A3537	A3539	25498	50-008-002	50-007-005	915034



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
DRESSER	TD6		SEALED	1.25	5.97	6.00	A3537	A3539	25498	50-008-002	50-007-005	915034
DRESSER	100C		SEALED	1.25	6.50	6.00	A3537	A3539	25498	50-008-002	50-007-005	915040
DRESSER	100E		SEALED	1.25	6.50	5.99	A3537	A3539	25498	50-008-002	50-007-005	915100
DRESSER	D32E		SEALED	1.25	6.50	6.00	A3537	A3539	25498	50-008-002	50-007-005	915040
DRESSER	D32P		SEALED	1.25	6.50	6.00	A3537	A3539	25498	50-008-002	50-007-005	915040
DRESSER	T7		SEALED	1.25	6.50	6.00	A3537	A3539	25498	50-008-002	50-007-005	915040
DRESSER	TD7		SEALED	1.25	6.50	6.00	A3537	A3539	25498	50-008-002	50-007-005	915040
DRESSER	TD7C		SEALED	1.25	6.50	6.00	A3537	A3539	25498	50-008-002	50-007-005	915040
DRESSER	TD7E		SEALED	1.25	6.50	5.99	A3537	A3539	25498	50-008-002	50-007-005	915100
DRESSER	100G		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	125G		UNSEALED	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915213
DRESSER	125G		SEALED	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915040
DRESSER	125G		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D32		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D32E		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D32-P1		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D38E		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D38P-1		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D39		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	D39E		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	TD7G		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	TD7H		UNSEALED	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915213
DRESSER	TD8G		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	TD8G		SEALED	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915040
DRESSER	TD-8G		UNSEALED	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915213
DRESSER	TD9H		SALT	1.31	6.69	6.49	A3537	A3540	25499	50-008-002	50-007-005	915133
DRESSER	125C		SEALED	1.38	6.69	6.49	B3635	A3540	25499	50-008-002	50-007-004	915048
DRESSER	125E		SEALED	1.38	6.69	6.49	B3635	A3540	25499	50-008-002	50-007-004	915048
DRESSER	150		SEALED	1.38	6.69	6.49	B3635	A3540	25499	50-008-002	50-007-004	915048
DRESSER	TD8C		SEALED	1.38	6.69	6.49	B3635	A3540	25499	50-008-002	50-007-004	915048
DRESSER	TD8E		SEALED	1.38	6.69	6.49	B3635	A3540	25499	50-008-002	50-007-004	915048
DRESSER	TD9B		SEALED	1.38	6.69	6.49	B3635	A3540	25499	50-008-002	50-007-004	915048
DRESSER	TD12		SALT	1.50	8.03	7.49	B3635	A3540	25500	50-008-002	50-007-010	915095
DRESSER	TD12A		UNSEALED	1.50	8.03	7.49	B3635	A3540	25500	50-008-002	50-007-010	915210
DRESSER	TD12B		UNSEALED	1.50	8.03	7.49	B3635	A3540	25500	50-008-002	50-007-010	915210
DRESSER	175		SEALED	1.63	7.87	6.99	B3635	A3540	25547	50-008-002	50-007-003	915041
DRESSER	175B		SEALED	1.63	7.87	6.99	B3635	A3540	25547	50-008-002	50-007-003	915041
DRESSER	TD14		SEALED	1.63	7.87	6.99	B3635	A3540	25547	50-008-002	50-007-003	915041
DRESSER	TD15		SEALED	1.63	7.87	6.99	B3635	A3540	25547	50-008-002	50-007-003	915041
DRESSER	TD15B		SEALED	1.63	7.87	6.99	B3635	A3540	25547	50-008-002	50-007-003	915041
DRESSER	TD12C		UNSEALED	1.63	8.81	7.49	B3635	A3540	25547	50-008-002	50-007-003	915211
DRESSER	TD15C		SALT	1.63	8.81	7.49	B3635	A3540	25547	50-008-002	50-007-003	915021
DRESSER	TD15C	LGP	SALT	1.63	8.81	7.49	B3635	A3540	25547	50-008-002	50-007-003	915021
DRESSER	TD15C	SPLIT	UNSEALED	1.63	8.81	7.49	B3635	A3540	25547	50-008-002	50-007-003	915211
DRESSER	TD15C	SPLIT	SEALED	1.63	8.81	7.49	B3635	A3540	25547	50-008-002	50-007-003	915021
DRESSER	TD12C-XP		SEALED	1.63	8.82	7.49	B3635	A3540	25547	50-008-002	50-007-003	915083
DRESSER	TD12		SEALED	1.75	8.03	7.49	B3635	A3540	25548	50-008-002	50-007-002	915095
DRESSER	175B		SEALED	1.75	8.81	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	175C		SEALED	1.75	8.81	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	TD15B		SEALED	1.75	8.81	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	TD15C		SEALED	1.75	8.81	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	TD15E		SEALED	1.75	8.81	7.98	B3635	A3540	25548	50-008-002	50-007-002	915108
DRESSER	TD15E		SALT	1.75	8.81	7.98	B3635	A3540	25548	50-008-002	50-007-002	915109
DRESSER	TD15E	LGP	SALT	1.75	8.81	7.98	B3635	A3540	25548	50-008-002	50-007-002	915109
DRESSER	250B		SEALED	1.75	9.31	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036



WTC Machinery FP 150 Tooling Chart

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
DRESSER	250C		SEALED	1.75	9.31	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	TD20B		SEALED	1.75	9.31	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	TD20C		SEALED	1.75	9.31	7.50	B3635	A3540	25548	50-008-002	50-007-002	915036
DRESSER	D87E-2		SALT	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915077
DRESSER	D87P		SALT	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915077
DRESSER	TD20E		UNSEALED	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915212
DRESSER	TD20E		SALT	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915077
DRESSER	TD20G		UNSEALED	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915212
DRESSER	TD20G		SALT	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915077
DRESSER	TD20G	LGP	SALT	1.87	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915077
DRESSER	TD20C		SEALED	1.88	9.31	8.50	B3815	A3541	25551	50-008-002	50-007-002	915035
DRESSER	TD20E	SPLIT	SEALED	1.88	10.43	8.50	B3815	A3541	25551	50-008-002	50-007-002	915077
DRESSER	TD20E		SEALED	1.88	10.44	8.50	B3815	A3541	25551	50-008-002	50-007-002	915038
DRESSER	TD24		SEALED	1.88	11.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915037
DRESSER	TD25B		SEALED	1.88	11.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915037
DRESSER	TD25C		SEALED	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD25C		SALT	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD25E		SEALED	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD25E	SPLIT	SEALED	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD25E		SALT	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD25G		UNSEALED	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD25G		SALT	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD30		SEALED	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD30		SALT	2.13	11.00	9.87	B3607/8	A3541	25501	50-008-002	50-007-001	915102
DRESSER	TD40	SPLIT	SALT	2.46	12.60	11.02	B3607/8	A3541	25553	50-020	50-021-2	915101
DRESSER	TD40	SPLIT	SEALED	2.46	12.60	11.02	B3607/8	A3541	25553	50-020	50-021-2	915101
FIAT	FL4		UNSEALED	0.87	5.12	4.92	#N/A	A3539	25503	50-008-002	50-007-008	915316
FIAT	AD4		UNSEALED	0.98	5.28	5.51	A3536	A3539	200281	50-008-002	50-007-007	915028
FIAT	B1		UNSEALED	0.98	5.28	5.51	A3536	A3539	200281	50-008-002	50-007-007	915028
FIAT	FL4AC		UNSEALED	0.98	5.28	5.51	A3536	A3539	200281	50-008-002	50-007-007	915028
FIAT	FL4AD		UNSEALED	0.98	5.28	5.51	A3536	A3539	200281	50-008-002	50-007-007	915028
FIAT	FL4L		UNSEALED	0.98	5.28	5.51	A3536	A3539	200281	50-008-002	50-007-007	915028
FIAT	FL4	Berco	UNSEALED	0.98	5.35	5.51	A3536	A3539	200281	50-008-002	50-007-007	915046
FIAT	FD5		UNSEALED	1.14	6.46	6.30	A3536	A3539	200281	50-008-002	50-007-006	915120
FIAT	FD7		UNSEALED	1.14	6.46	6.30	A3536	A3539	200281	50-008-002	50-007-006	915120
FIAT	FL5		UNSEALED	1.14	6.46	6.30	A3536	A3539	200281	50-008-002	50-007-006	915120
FIAT	FL7		UNSEALED	1.14	6.46	6.30	A3536	A3539	200281	50-008-002	50-007-006	915120
FIAT	AD5		UNSEALED	1.18	6.10	6.30	A3536	A3539	25498	50-008-002	50-007-006	915027
FIAT	FL6		UNSEALED	1.18	6.10	6.30	A3536	A3539	25498	50-008-002	50-007-006	915027
FIAT	FL6	Berco	UNSEALED	1.18	6.10	6.30	A3536	A3539	25498	50-008-002	50-007-006	915170
FIAT	652		UNSEALED	1.25	6.24	6.00	A3537	A3539	25498	50-008-002	50-007-005	915004
FIAT	653		UNSEALED	1.25	6.24	6.00	A3537	A3539	25498	50-008-002	50-007-005	915004
FIAT	655		UNSEALED	1.25	6.24	6.00	A3537	A3539	25498	50-008-002	50-007-005	915004
FIAT	H4		UNSEALED	1.25	6.24	6.00	A3537	A3539	25498	50-008-002	50-007-005	915004
FIAT	HD4	S/N 3001 & UP	UNSEALED	1.25	6.24	6.00	A3537	A3539	25498	50-008-002	50-007-005	915004
FIAT	H3		UNSEALED	1.25	5.84	6.00	A3537	A3539	25498	50-008-002	50-007-005	915219
FIAT	H4		UNSEALED	1.25	5.84	6.00	A3537	A3539	25498	50-008-002	50-007-005	915219
FIAT	HD3		UNSEALED	1.25	5.84	6.00	A3537	A3539	25498	50-008-002	50-007-005	915219
FIAT	HD4		UNSEALED	1.25	5.84	6.00	A3537	A3539	25498	50-008-002	50-007-005	915219
FIAT	FD5		SALT	1.26	6.42	6.30	A3537	A3539	25498	50-008-002	50-007-005	915130
FIAT	FD7		SALT	1.26	6.42	6.30	A3537	A3539	25498	50-008-002	50-007-005	915130
FIAT	FL5		SALT	1.26	6.42	6.30	A3537	A3539	25498	50-008-002	50-007-005	915130
FIAT	FL5B		SALT	1.26	6.42	6.30	A3537	A3539	25498	50-008-002	50-007-005	915130
FIAT	FL7		SALT	1.26	6.42	6.30	A3537	A3539	25498	50-008-002	50-007-005	915130
FIAT	FL7B		SALT	1.26	6.42	6.30	A3537	A3539	25498	50-008-002	50-007-005	915130



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
FIAT	HD5		UNSEALED	1.38	6.91	6.50	B3635	A3540	25499	50-008-002	50-007-004	915014
FIAT	HD5		SEALED	1.38	6.91	6.50	B3635	A3540	25499	50-008-002	50-007-004	915014
FIAT	HD6		UNSEALED	1.38	6.91	6.50	B3635	A3540	25499	50-008-002	50-007-004	915014
FIAT	HD6		SEALED	1.38	6.91	6.50	B3635	A3540	25499	50-008-002	50-007-004	915014
FIAT	AD6		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	AD7		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	AD7C		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	AD9		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	BD7		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	BD7C		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	BD9		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	FL7		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	FL8		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	FL8C		UNSEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	F318		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FE16		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FE20		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FE20LC		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FE8LC		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FH120		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FH150		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	FH150LC		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	PH130		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	S9		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	S11		SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	SL9	30/241 & UP	SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	SL11	33/281 & UP	SEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915154
FIAT	AD8		UNSEALED	1.38	7.13	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	BD8		UNSEALED	1.38	7.13	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	FL9		UNSEALED	1.38	7.13	6.69	B3635	A3540	25499	50-008-002	50-007-004	915025
FIAT	FD9		UNSEALED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915014
FIAT	FD9		SALT	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915014
FIAT	FH200		SEALED	1.46	8.03	6.93	B3635	A3540	25500	50-008-002	50-007-004	915118
FIAT	FH200LC		SEALED	1.46	8.03	6.93	B3635	A3540	25500	50-008-002	50-007-004	915118
FIAT	AD10		UNSEALED	1.46	7.87	6.93	B3635	A3540	25500	50-008-002	50-007-004	915022
FIAT	AD10B		UNSEALED	1.46	7.87	6.93	B3635	A3540	25500	50-008-002	50-007-004	915022
FIAT	BD10		UNSEALED	1.46	7.87	6.93	B3635	A3540	25500	50-008-002	50-007-004	915022
FIAT	BD10B		UNSEALED	1.46	7.87	6.93	B3635	A3540	25500	50-008-002	50-007-004	915022
FIAT	FL10		UNSEALED	1.46	7.87	6.93	B3635	A3540	25500	50-008-002	50-007-004	915022
FIAT	FL10B		UNSEALED	1.46	7.87	6.93	B3635	A3540	25500	50-008-002	50-007-004	915022
FIAT	HD7	S/N 1103 & UP	UNSEALED	1.57	8.14	6.50	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD11	S/N 7538-10000	SEALED	1.56	8.14	7.00	B3635	A3540	25547	50-008-002	50-007-010	915031
FIAT	HD7G-B		SEALED	1.56	8.14	7.00	B3635	A3540	25547	50-008-002	50-007-010	915031
FIAT	GH11E	S/N 10000 & DN	UNSEALED	1.57	8.14	7.00	B3635	A3540	25547	50-008-002	50-007-010	915214
FIAT	HD11	S/N 1000 & DN	UNSEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD11E	S/N 10000 & DN	SEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD11G	S/N 8940 & DN	SEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD11G	S/N 8940 & DN	UNSEALED	1.57	8.14	7.00	B3635	A3540	25547	50-008-002	50-007-010	915214
FIAT	HD11G	S/N 8940 & UP	UNSEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD7G		SEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD7G		UNSEALED	1.57	8.14	7.00	B3635	A3540	25547	50-008-002	50-007-010	915214
FIAT	HD7G		UNSEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	HD9		UNSEALED	1.57	8.14	7.00	B3635	A3540	25547	50-008-002	50-007-010	915214
FIAT	HD9		SEALED	1.57	8.14	7.01	B3635	A3540	25547	50-008-002	50-007-010	915023
FIAT	AD12		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
FIAT	AD14		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	BD12		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	BD14		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FA200		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FD14		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL14		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL14D		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL14E		SALT	1.58	8.66	6.00	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	14B		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	AD12		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	AD14		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	BD12		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	BD14		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL12		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL14		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL14B		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	FL14C		UNSEALED	1.58	8.66	7.48	B3635	A3540	25547	50-008-002	50-007-010	915022
FIAT	HD11	S/N 10001 & UP	UNSEALED	1.62	8.40	7.01	B3635	A3540	25547	50-008-002	50-007-003	915024
FIAT	HD11	SN 5901 & UP	SEALED	1.62	8.40	7.01	B3635	A3540	25547	50-008-002	50-007-003	915024
FIAT	HD11B		SEALED	1.62	8.40	7.01	B3635	A3540	25547	50-008-002	50-007-003	915024
FIAT	HD11B	S/N 10001-19484	UNSEALED	1.62	8.40	7.01	B3635	A3540	25547	50-008-002	50-007-003	915024
FIAT	HD11B	S/N 19485 & UP	UNSEALED	1.62	8.60	7.01	B3635	A3540	25547	50-008-002	50-007-003	915215
FIAT	HD7	S/N 1102 & DN	UNSEALED	1.74	7.51	6.50	B3635	A3540	25548	50-008-002	50-007-002	915026
FIAT	K		UNSEALED	1.74	7.51	6.50	B3635	A3540	25548	50-008-002	50-007-002	915026
FIAT	KO		UNSEALED	1.74	7.51	6.50	B3635	A3540	25548	50-008-002	50-007-002	915026
FIAT	HD10		UNSEALED	1.75	8.37	7.85	B3635	A3540	25548	50-008-002	50-007-002	915220
FIAT	HD5		UNSEALED	1.75	8.37	7.85	B3635	A3540	25548	50-008-002	50-007-002	915220
FIAT	HD50		UNSEALED	1.75	8.37	7.85	B3635	A3540	25548	50-008-002	50-007-002	915220
FIAT	HD15		UNSEALED	1.75	9.33	7.86	B3635	A3540	25548	50-008-002	50-007-002	915021
FIAT	HD16	S/N 5900 & DN	UNSEALED	1.75	9.33	7.86	B3635	A3540	25548	50-008-002	50-007-002	915021
FIAT	AD18		UNSEALED	1.87	9.84	8.50	B3815	A3541	25551	50-008-002	50-007-002	915019
FIAT	AD20		UNSEALED	1.87	9.84	8.50	B3815	A3541	25551	50-008-002	50-007-002	915019
FIAT	BD18		UNSEALED	1.87	9.84	8.50	B3815	A3541	25551	50-008-002	50-007-002	915019
FIAT	BD20		UNSEALED	1.87	9.84	8.50	B3815	A3541	25551	50-008-002	50-007-002	915019
FIAT	FD20		UNSEALED	1.87	9.84	8.50	B3815	A3541	25551	50-008-002	50-007-002	915019
FIAT	FL20	S/N 7607 & DN	UNSEALED	1.87	9.84	8.50	B3815	A3541	25551	50-008-002	50-007-002	915019
FIAT	12G		UNSEALED	1.87	10.27	7.86	B3815	A3541	25551	50-008-002	50-007-002	915020
FIAT	HD16	S/N 5901 & UP	UNSEALED	1.87	10.27	7.86	B3815	A3541	25551	50-008-002	50-007-002	915020
FIAT	HD14		UNSEALED	1.88	9.67	7.85	B3815	A3541	25551	50-008-002	50-007-002	915020
FIAT	12G		SEALED	1.88	10.27	7.85	B3815	A3541	25551	50-008-002	50-007-002	915020
FIAT	HD16	S/N 5901 & UP	SEALED	1.88	10.27	7.85	B3815	A3541	25551	50-008-002	50-007-002	915020
FIAT	HD19		UNSEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915217
FIAT	HD19		SEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	HD20		UNSEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915217
FIAT	HD20		SEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	HD21B		UNSEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915018
FIAT	HD21B		SEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915016
FIAT	HD21P	S/N 14942 & DN	UNSEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915217
FIAT	HD21P	S/N 14942 & DN	SEALED	1.88	11.66	9.00	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	12GB		SEALED	1.88	10.27	7.86	B3815	A3541	25551	50-008-002	50-007-002	915030
FIAT	HD16B		SEALED	1.88	10.27	7.86	B3815	A3541	25551	50-008-002	50-007-002	915030
FIAT	HD19		SEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	HD20		SEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	HD21	S/N 14942 & DN	UNSEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915221
FIAT	HD21	S/N14943 & UP	UNSEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915017



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
FIAT	HD21	S/N 13871-14942	SEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	HD21	S/N14943 & UP	SEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	HD21P	S/N 14943 & UP	UNSEALED	1.88	11.66	9.01	B3815	A3541	25551	50-008-002	50-007-002	915017
FIAT	FD20		SALT	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
FIAT	FL20	7608 & UP	SALT	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
FIAT	FD30		UNSEALED	2.04	11.66	9.04	B3815	A3541	25551	50-008-002	50-007-001	915016
FIAT	FD30		SALT	2.04	11.65	9.04	B3815	A3541	25551	50-008-002	50-007-001	915105
FIAT	HD21C		UNSEALED	2.04	11.66	9.04	B3815	A3541	25551	50-008-002	50-007-001	915016
FIAT	FD31		SEALED	2.37	12.95	11.25	B3607/8	A3541	25553	50-020	50-021-2	915029
FIAT	FD31		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915094
FIAT	FD40		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915094
FIAT	HD31		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915094
FIAT	HD41		SEALED	2.37	12.95	11.25	B3607/8	A3541	25553	50-020	50-021-2	915029
FIAT	HD41		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915094
FIAT	31		UNSEALED	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915142
FIAT	31		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915221
FIAT	FD40		UNSEALED	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915142
FIAT	FD40		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915221
FIAT	FD40B		UNSEALED	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915142
FIAT	FD40B		SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915221
FIAT	FP120	S/N 41-3000	UNSEALED	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915142
FIAT	FP120	S/N 41-3000	SALT	2.37	12.95	11.28	B3607/8	A3541	25553	50-020	50-021-2	915221
FIAT	FD31		UNSEALED	2.38	12.95	11.25	B3607/8	A3541	25553	50-020	50-021-2	915073
FIAT	FD40		UNSEALED	2.38	12.95	11.25	B3607/8	A3541	25553	50-020	50-021-2	915073
FIAT	HD31		UNSEALED	2.38	12.95	11.25	B3607/8	A3541	25553	50-020	50-021-2	915073
FIAT	HD41		UNSEALED	2.38	12.95	11.25	B3607/8	A3541	25553	50-020	50-021-2	915073
FIAT	41B		UNSEALED	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915218
FIAT	41B		SALT	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915218
FIAT	FD50		UNSEALED	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915218
FIAT	FD50		SALT	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915218
FIAT	HD41B		SALT	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915218
FIAT	HD50		SALT	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915218
FIAT	HD41B		UNSEALED	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915033
FIAT	HD50		UNSEALED	2.62	14.00	11.28	B3631/2	A3541-001	25553	50-020	50-021-3	915033
HITACHI	EX100		UNSEALED	1.32	7.28	6.74	A3537	A3540	25499	50-008-002	50-007-005	915223
HITACHI	EX120		UNSEALED	1.32	7.28	6.74	A3537	A3540	25499	50-008-002	50-007-005	915223
HITACHI	EX90		UNSEALED	1.32	7.28	6.74	A3537	A3540	25499	50-008-002	50-007-005	915223
HITACHI	EX150		SEALED	1.38	7.60	6.75	B3635	A3540	25499	50-008-002	50-007-004	915002
HITACHI	UH083		SALT	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
HITACHI	EX200		SEALED	1.44	8.35	7.48	B3635	A3540	25500	50-008-002	50-007-004	915134
HITACHI	EX220		SEALED	1.50	8.35	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042
HITACHI	EX300		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
HITACHI	ZX350		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
HITACHI	EX400		SEALED	1.88	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
HITACHI	EX550		SEALED	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915087
HITACHI	EX700		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
HITACHI	EX800		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
HITACHI	EX1100		SEALED	2.29	12.58	10.25	B3607/8	A3541	25553	50-020	50-021-2	915171
HITACHI	EX1200-5		SEALED	2.29	12.58	10.25	B3607/8	A3541	25553	50-020	50-021-2	915171
HITACHI	EX1200-6	Berco KM2346	SEALED	2.36	12.77	11.02	B3607/8	A3541	25553	50-020	50-021-2	915339
HYUNDAI	R160LC-9			1.40		7.00	B3635	A3540	25499	50-008-002	50-007-004	
JCB	JS220		SALT	1.75	9.93	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
JCB	JS300		SALT	1.75	9.93	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
JCB	JS330		SALT	1.75	9.93	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
JCB	JS360		SALT	1.75	9.93	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
JOHN DEERE	50		SEALED	0.87	4.84	5.32	#N/A	A3539	25503	50-008-002	50-007-008	915027
JOHN DEERE	80		SEALED	0.95	5.16	6.06	A3536	A3539	200281	50-008-002	50-007-007	915074
JOHN DEERE	80C		SEALED	0.95	5.16	6.06	A3536	A3539	200281	50-008-002	50-007-007	915074
JOHN DEERE	440		FLUSH	1.00	5.47	5.75	A3536	A3539	200281	50-008-002	50-007-007	915064
JOHN DEERE	2010	S/N 42000 & DN	FLUSH	1.00	5.47	5.75	A3536	A3539	200281	50-008-002	50-007-007	915064
JOHN DEERE	420C		FLUSH	1.00	5.47	5.75	A3536	A3539	200281	50-008-002	50-007-007	915064
JOHN DEERE	290D		SEALED	1.18	6.46	6.13	A3536	A3539	25498	50-008-002	50-007-006	915136
JOHN DEERE	291		SEALED	1.18	6.46	6.13	A3536	A3539	25498	50-008-002	50-007-006	915136
JOHN DEERE	70		SEALED	1.19	6.10	6.06	A3536	A3539	25498	50-008-002	50-007-006	915025
JOHN DEERE	190E		SEALED	1.19	6.10	6.06	A3536	A3539	25498	50-008-002	50-007-006	915025
JOHN DEERE	70D		SEALED	1.19	6.10	6.06	A3536	A3539	25498	50-008-002	50-007-006	915025
JOHN DEERE	350D		SEALED	1.19	5.38	5.75	A3536	A3539	25498	50-008-002	50-007-006	915027
JOHN DEERE	400G		SEALED	1.19	5.38	5.75	A3536	A3539	25498	50-008-002	50-007-006	915027
JOHN DEERE	350		FLUSH	1.19	5.47	5.75	A3536	A3539	25498	50-008-002	50-007-006	915065
JOHN DEERE	2010	S/N 42001 & UP	FLUSH	1.19	5.47	5.75	A3536	A3539	25498	50-008-002	50-007-006	915065
JOHN DEERE	350B		FLUSH	1.19	5.47	5.75	A3536	A3539	25498	50-008-002	50-007-006	915065
JOHN DEERE	350C		FLUSH	1.19	5.47	5.75	A3536	A3539	25498	50-008-002	50-007-006	915065
JOHN DEERE	450C		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	450D		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	450G		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	450H		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	450J		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	455G		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	550A		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	550B		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	550G		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	550H		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	550J		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	550K		SALT	1.26	6.38	6.29	A3537	A3539	25498	50-008-002	50-007-005	915014
JOHN DEERE	450D		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	450E		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	450G		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	450H		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	450J		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	455D		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	455G		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	550A		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	550B		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	550G		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	550H		SEALED	1.26	6.36	6.29	A3537	A3539	25498	50-008-002	50-007-005	915046
JOHN DEERE	120 EXC		SEALED	1.30	7.24	6.96	A3537	A3539	25499	50-008-002	50-007-005	915059
JOHN DEERE	450J	Max Life Undercarriage	SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	550J	Max Life Undercarriage	SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	550K	Max Life Undercarriage	SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	555G		SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650G		SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650H		SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650J		SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650K		SALT	1.31	7.24	6.73	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650K	Max Life Undercarriage	SALT	1.31	7.39	6.75	A3537	A3540	25499	50-008-002	50-007-005	915269
JOHN DEERE	555G		SEALED	1.32	7.22	6.29	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650G		SEALED	1.32	7.22	6.29	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650H		SEALED	1.32	7.22	6.29	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	650J		SEALED	1.32	7.22	6.29	A3537	A3540	25499	50-008-002	50-007-005	915089
JOHN DEERE	110		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915002



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
JOHN DEERE	120		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915002
JOHN DEERE	135		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915002
JOHN DEERE	120C		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915002
JOHN DEERE	490D		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915002
JOHN DEERE	EX120		SEALED	1.32	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915002
JOHN DEERE	490		RECESSED	1.32	6.97	6.75	A3537	A3540	25499	50-008-002	50-007-005	915074
JOHN DEERE	690A		RECESSED	1.32	6.97	6.75	A3537	A3540	25499	50-008-002	50-007-005	915074
JOHN DEERE	690B		RECESSED	1.32	6.97	6.75	A3537	A3540	25499	50-008-002	50-007-005	915074
JOHN DEERE	690C		RECESSED	1.32	6.97	6.75	A3537	A3540	25499	50-008-002	50-007-005	915074
JOHN DEERE	690D		RECESSED	1.32	6.97	6.75	A3537	A3540	25499	50-008-002	50-007-005	915074
JOHN DEERE	693B		RECESSED	1.32	6.97	6.75	A3537	A3540	25499	50-008-002	50-007-005	915074
JOHN DEERE	490E		SEALED	1.33	6.70	6.73	A3537	A3540	25499	50-008-002	50-007-005	915166
JOHN DEERE	EX120-2		SEALED	1.33	6.70	6.73	A3537	A3540	25499	50-008-002	50-007-005	915166
JOHN DEERE	590	S/N 001787 & UP	SEALED	1.37	7.60	6.75	A3537	A3540	25499	50-008-002	50-007-004	915228
JOHN DEERE	590D	S/N 1787 & UP	SEALED	1.37	7.60	6.75	A3537	A3540	25499	50-008-002	50-007-004	915142
JOHN DEERE	450		RECESSED	1.38	6.08	6.29	B3635	A3540	25499	50-008-002	50-007-004	915056
JOHN DEERE	450B		RECESSED	1.38	6.08	6.29	B3635	A3540	25499	50-008-002	50-007-004	915056
JOHN DEERE	450C	S/N 216337 & DN	RECESSED	1.38	6.08	6.29	B3635	A3540	25499	50-008-002	50-007-004	915056
JOHN DEERE	550		SEALED	1.38	6.20	6.29	B3635	A3540	25499	50-008-002	50-007-004	915074
JOHN DEERE	555		SEALED	1.38	6.20	6.29	B3635	A3540	25499	50-008-002	50-007-004	915074
JOHN DEERE	450C	S/N 216338 & UP	SEALED	1.38	6.20	6.29	B3635	A3540	25499	50-008-002	50-007-004	915074
JOHN DEERE	450		FLUSH	1.38	6.08	6.29	B3635	A3540	25499	50-008-002	50-007-004	915056
JOHN DEERE	590D		SEALED	1.38	7.60	6.75	B3635	A3540	25499	50-008-002	50-007-004	915002
JOHN DEERE	EX150		SEALED	1.38	7.60	6.75	B3635	A3540	25499	50-008-002	50-007-004	915002
JOHN DEERE	750C		SALT	1.44	8.13	7.48	B3635	A3540	25500	50-008-002	50-007-004	915052
JOHN DEERE	690E		SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915079
JOHN DEERE	690ELC		SEALED	1.44	8.15	7.48	B3635	A3540	25500	50-008-002	50-007-004	915079
JOHN DEERE	1280	EXC		1.44	8.11	6.90	B3635	A3540	25500	50-008-002	50-007-004	915229
JOHN DEERE	655		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	655		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	700		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	750		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	750		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	755		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	755		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	1150D		SALT	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915215
JOHN DEERE	1155D		SALT	1.44	8.11	6.68	B3635	A3540	25500	50-008-002	50-007-004	915215
JOHN DEERE	655B		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	693D		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	700H	Link T70316 & T70317	SALT	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915270
JOHN DEERE	700J		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	700J	Link T70316 & T70317	SALT	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915270
JOHN DEERE	700J	Link T149070 & T149071	SALT	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915163
JOHN DEERE	700K		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	750B		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	750B		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	755B		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	JD700		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	JD700HLGP		SEALED	1.44	8.11	6.91	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	JD700HLGP		SALT	1.44	8.11	6.99	B3635	A3540	25500	50-008-002	50-007-004	915042
JOHN DEERE	700J	Max Life Undercarriage	SALT	1.44	8.62	7.48	B3635	A3540	25500	50-008-002	50-007-004	915272
JOHN DEERE	700K	Max Life Undercarriage	SALT	1.44	8.62	7.48	B3635	A3540	25500	50-008-002	50-007-004	915272
JOHN DEERE	160CLC		SEALED	1.49	8.34	7.48	B3635	A3540	25500	50-008-002	50-007-010	915252
JOHN DEERE	160LC		SEALED	1.49	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042
JOHN DEERE	200LC		SEALED	1.49	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
JOHN DEERE	230		SEALED	1.49	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042
JOHN DEERE	230LC		SEALED	1.49	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042
JOHN DEERE	790E		SEALED	1.49	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042
JOHN DEERE	790ELC		SEALED	1.49	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915042
JOHN DEERE	250G	Recessed	SEALED	1.50	8.37	7.48	B3635	A3540	25500	50-008-002	50-007-010	915279
JOHN DEERE	790		SEALED	1.50	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915022
JOHN DEERE	230CLC		SEALED	1.50	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915023
JOHN DEERE	230LC		SEALED	1.50	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915023
JOHN DEERE	240D		SEALED	1.50	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915023
JOHN DEERE	790D		SEALED	1.50	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915023
JOHN DEERE	750J		SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915080
JOHN DEERE	750J	Berco Extended Pin Ross	SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915080
JOHN DEERE	750K		SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915080
JOHN DEERE	750K	Berco Extended Pin Ross	SALT	1.50	9.39	7.48	B3635	A3540	25500	50-008-002	50-007-010	915080
JOHN DEERE	755C		SEALED	1.75	9.06	8.00	B3635	A3540	25548	50-008-002	50-007-002	915013
JOHN DEERE	850		SEALED	1.75	9.06	8.00	B3635	A3540	25548	50-008-002	50-007-002	915013
JOHN DEERE	850C		SEALED	1.75	9.06	8.00	B3635	A3540	25548	50-008-002	50-007-002	915013
JOHN DEERE	270LC		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
JOHN DEERE	792		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
JOHN DEERE	792D		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
JOHN DEERE	892D		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
JOHN DEERE	892E		SEALED	1.75	9.65	8.00	B3635	A3540	25548	50-008-002	50-007-002	915121
JOHN DEERE	850J		SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915175
JOHN DEERE	850J	Berco Extended Pin Ross	SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915280
JOHN DEERE	850K		SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915175
JOHN DEERE	850K	Berco Extended Pin Ross	SALT	1.75	10.32	8.00	B3635	A3540	25548	50-008-002	50-007-002	915280
JOHN DEERE	755C		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915106
JOHN DEERE	850B		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915106
JOHN DEERE	850C		SALT	1.75	9.06	7.98	B3635	A3540	25548	50-008-002	50-007-002	915106
JOHN DEERE	755A		SEALED	1.75	9.13	7.98	B3635	A3540	25548	50-008-002	50-007-002	915099
JOHN DEERE	850B		SEALED	1.75	9.13	7.98	B3635	A3540	25548	50-008-002	50-007-002	915099
JOHN DEERE	350G		SEALED	1.76	9.53	8.50	B3635	A3540	25548	50-008-002	50-007-002	915323
JOHN DEERE	270CLC		SEALED	1.76	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915162
JOHN DEERE	330CLC		SEALED	1.76	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915162
JOHN DEERE	330LC	EXC	SEALED	1.76	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915162
JOHN DEERE	350GLC	BERCO	SEALED	1.77	9.50	8.50	B3635	A3540	25548	50-008-002	50-007-002	915273
JOHN DEERE	950J		SALT	1.87	10.86	8.50	B3815	A3541	25551	50-008-002	50-007-002	915189
JOHN DEERE	370		SEALED	1.87	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915087
JOHN DEERE	450CLC		SEALED	1.87	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915087
JOHN DEERE	450LC		SEALED	1.87	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915087
JOHN DEERE	992D		SEALED	1.87	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915087
JOHN DEERE	992E		SEALED	1.87	10.00	8.50	B3815	A3541	25551	50-008-002	50-007-002	915087
JOHN DEERE	950K	Berco Extended Pin Ross	SALT	1.88	10.87	8.50	B3815	A3541	25551	50-008-002	50-007-002	915329
JOHN DEERE	855		SEALED	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915083
JOHN DEERE	890		SEALED	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915083
JOHN DEERE	890A		SEALED	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915083
JOHN DEERE	990		SEALED	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915083
JOHN DEERE	1050K		SALT	1.88	9.92	8.50	B3815	A3541	25551	50-008-002	50-007-002	915102
JOHN DEERE	1050K	Snap Ring AT468536	SALT	1.88	9.92	8.50	B3815	A3541	25551	50-008-002	50-007-002	915324
JOHN DEERE	890		RECESSED	1.88	9.90	8.50	B3815	A3541	25551	50-008-002	50-007-002	915227
JOHN DEERE	855		SALT	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915006
JOHN DEERE	1050C		SALT	2.00	10.31	8.50	B3815	A3541	25551	50-008-002	50-007-001	915172
JOHN DEERE	1050J		SALT	2.00	10.31	8.50	B3815	A3541	25551	50-008-002	50-007-001	915172
KOBELCO	SK135SR-2	Berco LK 49A	SEALED	1.31	7.01	6.75	A3537	A3540	25499	50-008-002	50-007-005	915140
KOBELCO	K909A		UNSEALED	1.50	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915023



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
KOMATSU	PC75	Berco KM3041A	SEALED	0.95	5.16	6.06	A3536	A3539	200281	50-008-002	50-007-007	915180
KOMATSU	D20		SALT	0.95	5.55	5.31	A3536	A3539	200281	50-008-002	50-007-007	915123
KOMATSU	D21		SALT	0.95	5.55	5.31	A3536	A3539	200281	50-008-002	50-007-007	915123
KOMATSU	PC60	EXC	SEALED	0.95	5.55	5.31	A3536	A3539	200281	50-008-002	50-007-007	915123
KOMATSU	D20		SEALED	0.95	5.63	5.31	A3536	A3539	200281	50-008-002	50-007-007	915124
KOMATSU	D21		SEALED	0.95	5.63	5.31	A3536	A3539	200281	50-008-002	50-007-007	915124
KOMATSU	D30S-1		SEALED	1.09	6.59	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D30-15		SEALED	1.10	6.59	6.06	A3536	A3539	200281	50-008-002	50-007-006	915057
KOMATSU	D30A		SEALED	1.10	6.59	6.06	A3536	A3539	200281	50-008-002	50-007-006	915057
KOMATSU	D30S-15	S/N 5016 & UP	SEALED	1.10	6.59	6.06	A3536	A3539	200281	50-008-002	50-007-006	915057
KOMATSU	D31-15		SEALED	1.10	6.59	6.06	A3536	A3539	200281	50-008-002	50-007-006	915057
KOMATSU	D31E-12		SEALED	1.10	6.59	6.06	A3536	A3539	200281	50-008-002	50-007-006	915057
KOMATSU	D31-16		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31E		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31P		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31P-20		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31PL		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31PLL	S/N 29001 & UP	SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31PX		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31S		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D37		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D37P		SALT	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31-16		SEALED	1.10	6.69	6.06	A3536	A3539	200281	50-008-002	50-007-006	915058
KOMATSU	D31		UNSEALED	1.18	6.69	6.06	A3536	A3539	25498	50-008-002	50-007-006	915069
KOMATSU	D31P		UNSEALED	1.18	6.69	6.06	A3536	A3539	25498	50-008-002	50-007-006	915069
KOMATSU	PC100		UNSEALED	1.18	6.69	6.06	A3536	A3539	25498	50-008-002	50-007-006	915069
KOMATSU	PC100		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915161
KOMATSU	PC100-6		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915161
KOMATSU	PC120		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915161
KOMATSU	PC120LC-6		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915161
KOMATSU	PC130-6		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915161
KOMATSU	PC138		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915161
KOMATSU	PC100-1		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC100-2		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC100-3		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC120-1		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC120-2		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC120-3		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC80-1		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC80-3		SEALED	1.18	6.54	6.06	A3536	A3539	25498	50-008-002	50-007-006	915110
KOMATSU	PC100	PITCH ALSO 6.89	SEALED	1.18	6.81	6.06	A3536	A3539	25498	50-008-002	50-007-006	915126
KOMATSU	PC120	PITCH ALSO 6.89	SEALED	1.18	6.81	6.06	A3536	A3539	25498	50-008-002	50-007-006	915126
KOMATSU	PC120-6		SEALED	1.18	6.81	6.89	A3536	A3539	25498	50-008-002	50-007-006	915126
KOMATSU	PC120-6		SEALED	1.18	6.81	6.90	A3536	A3539	25498	50-008-002	50-007-006	915231
KOMATSU	PC80	PITCH ALSO 6.89	SEALED	1.18	6.81	6.06	A3536	A3539	25498	50-008-002	50-007-006	915126
KOMATSU	D41E	S/N 50201 & UP	SALT	1.31	7.22	6.75	A3537	A3539	25499	50-008-002	50-007-005	915067
KOMATSU	D41P-6	S/N 50201 & UP	SALT	1.31	7.22	6.75	A3537	A3539	25499	50-008-002	50-007-005	915067
KOMATSU	D39E		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D39EX		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D39P		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D39PX		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D41-6		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D41E		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D41P		SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052
KOMATSU	D6	S/N 50001-50200	SALT	1.31	7.24	6.75	A3537	A3539	25499	50-008-002	50-007-005	915052



WTC Machinery FP 150 Tooling Chart

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
KOMATSU	D40		SALT	1.38	7.13	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D50		SALT	1.38	7.13	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D53		SALT	1.38	7.13	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D58		SALT	1.38	7.13	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D63E		SALT	1.38	7.13	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D40		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D41	NEW	SALT	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915122
KOMATSU	D41		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D45A		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915059
KOMATSU	D45P-1	S/N 1501 & UP	SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915059
KOMATSU	D50		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D50-15		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915059
KOMATSU	D53	NEW	SALT	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915122
KOMATSU	D53-15		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915059
KOMATSU	D53-16		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D53A-15	S/N 60001 & UP	SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915059
KOMATSU	D58		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D63E		SEALED	1.38	7.17	6.89	B3635	A3540	25499	50-008-002	50-007-004	915060
KOMATSU	D51EX-22 / PX-22		SALT	1.43	8.66	6.90	B3635	A3540	25500	50-008-002	50-007-004	915192
KOMATSU	D41PX-12		SALT	1.43	7.85	6.88	B3635	A3540	25500	50-008-002	50-007-004	915163
KOMATSU	D40		RECESSED	1.49	8.58	6.89	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D45		RECESSED	1.49	8.58	6.89	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50		RECESSED	1.49	8.58	6.89	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50-11		RECESSED	1.49	8.58	6.89	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50-15		RECESSED	1.49	8.58	6.89	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50S-11		RECESSED	1.49	8.58	6.89	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D55-S		RECESSED	1.49	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915056
KOMATSU	D60-A		RECESSED	1.49	8.58	7.48	B3635	A3540	25500	50-008-002	50-007-010	915056
KOMATSU	PC100L-6		SEALED	1.49	8.66	7.49	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	PC160LC-8		SEALED	1.50	8.35	7.49	B3635	A3540	25500	50-008-002	50-007-010	915108
KOMATSU	PC200LC-8		SEALED	1.50	8.35	7.49	B3635	A3540	25500	50-008-002	50-007-010	915108
KOMATSU	PC240LC-8		SEALED	1.50	8.35	7.49	B3635	A3540	25500	50-008-002	50-007-010	915108
KOMATSU	PC240LC-10		SEALED	1.50	8.35	7.49	B3635	A3540	25500	50-008-002	50-007-010	915108
KOMATSU	D65		SEALED	1.49	8.66	7.49	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	PC200-8MO		SEALED	1.50	8.35	7.49	B3635	A3540	25500	50-008-002	50-007-010	915277
KOMATSU	D40P-1	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D41A	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D41P	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D41Q-3	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D41S	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D45A	S/N 12178+ BRCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D45B	S/N 12178+ BRCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50A	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50B	S/N 10901+ BRCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50P	S/N 10901+ BRCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D50S	S/N 10901+ BRCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D53A	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D55		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D57-1		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D57S-1		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D58E	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	D58P-1	BERCO	SEALED	1.50	8.66	6.91	B3635	A3540	25500	50-008-002	50-007-010	915059
KOMATSU	PC200		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	PC200-6		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	PC200-7		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
KOMATSU	PC200-8		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	PC220		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	PC240LC-6		SEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D61		SALT	1.50	8.90	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D61E		SALT	1.50	8.90	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D61EX		SALT	1.50	8.90	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D61P		SALT	1.50	8.90	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D61PX		SALT	1.50	8.90	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D61PX-12		SALT	1.50	8.90	7.48	B3635	A3540	25500	50-008-002	50-007-010	915060
KOMATSU	D41		UNSEALED	1.50	8.66	6.89	B3635	A3540	25500	50-008-002	50-007-010	915122
KOMATSU	D53		UNSEALED	1.50	8.66	6.89	B3635	A3540	25500	50-008-002	50-007-010	915122
KOMATSU	PC150		UNSEALED	1.50	8.66	6.89	B3635	A3540	25500	50-008-002	50-007-010	915122
KOMATSU	D57-1		UNSEALED	1.50	8.66	7.48	B3635	A3540	25500	50-008-002	50-007-010	915233
KOMATSU	PC210LC-11		SEALED	1.50	8.35	7.48	B3635	A3540	25500	50-008-002	50-007-010	915193
KOMATSU	PC300-5		SEALED	1.75	9.53	8.00	B3635	A3540	25548	50-008-002	50-007-002	915248
KOMATSU	D60		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65EX-12		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65EX-15		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65PX		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65PX-12		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65PX-15		SALT	1.75	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	PC250LC-6		SEALED	1.75	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915159
KOMATSU	PC270LC-6		SEALED	1.75	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915159
KOMATSU	PC270LC-7		SEALED	1.75	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915159
KOMATSU	PC300LC-6		SEALED	1.75	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915159
KOMATSU	PC300LC-7		SEALED	1.75	9.52	8.50	B3635	A3540	25548	50-008-002	50-007-002	915159
KOMATSU	PC300	EXC	SALT	1.75	9.53	8.00	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	D60-6		SEALED	1.75	9.26	8.00	B3635	A3540	25548	50-008-002	50-007-002	915062
KOMATSU	D80-7		SEALED	1.75	9.84	8.00	B3635	A3540	25548	50-008-002	50-007-002	915013
KOMATSU	D80-8		SEALED	1.75	9.84	8.00	B3635	A3540	25548	50-008-002	50-007-002	915013
KOMATSU	D65-6	S/N 34001 & UP	SALT	1.76	9.53	8.00	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	D66		SALT	1.76	9.53	8.00	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	D68		SALT	1.76	9.53	8.00	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	D60A	BERCO NON-OEM	SEALED	1.76	9.45	7.98	B3635	A3540	25548	50-008-002	50-007-002	915116
KOMATSU	D65A	BERCO NON-OEM	SEALED	1.76	9.45	7.98	B3635	A3540	25548	50-008-002	50-007-002	915116
KOMATSU	PC270LC-8		SEALED	1.76	9.53	8.52	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	PC290LC-10		SEALED	1.76	9.53	8.52	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	PC300LC-8		SEALED	1.76	9.53	8.52	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	PC350LC-8		SEALED	1.76	9.53	8.52	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	D60		SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65		SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65A		SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65E		SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D65P-6	S/N 20006 & UP	SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D66		SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	D68		SEALED	1.76	9.43	8.00	B3635	A3540	25548	50-008-002	50-007-002	915084
KOMATSU	PC300	EXC	SEALED	1.76	9.53	8.00	B3635	A3540	25548	50-008-002	50-007-002	915076
KOMATSU	PC360LC-10		SEALED	1.76	9.53	8.50	B3635	A3540	25548	50-008-002	50-007-002	915097
KOMATSU	D85		SEALED	1.77	9.84	8.50	B3635	A3540	25548	50-008-002	50-007-002	915085
KOMATSU	D85A		SEALED	1.77	9.84	8.50	B3635	A3540	25548	50-008-002	50-007-002	915085
KOMATSU	D85E-12	S/N 10001 & UP	SEALED	1.77	9.84	8.50	B3635	A3540	25548	50-008-002	50-007-002	915085
KOMATSU	D85E-12		SEALED	1.77	9.84	8.50	B3635	A3540	25548	50-008-002	50-007-002	915085
KOMATSU	D95-S		SEALED	1.77	10.00	8.50	B3635	A3540	25548	50-008-002	50-007-002	915232
KOMATSU	D75		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
KOMATSU	D80		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85A		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85E		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85P-18		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D95		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC400-3		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC400-5		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC400-6		SEALED	1.84	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC450LC-8		SEALED	1.85	9.21	9.01	B3635	A3541	25551	50-008-002	50-007-002	915092
KOMATSU	D75-S		SEALED	1.85	9.84	8.50	B3635	A3541	25551	50-008-002	50-007-002	915015
KOMATSU	D85A-12		SEALED	1.85	9.84	8.50	B3635	A3541	25551	50-008-002	50-007-002	915015
KOMATSU	PC300HD-6		SEALED	1.85	9.92	9.00	B3635	A3541	25551	50-008-002	50-007-002	915160
KOMATSU	PC300HD-8		SEALED	1.85	9.92	9.01	B3635	A3541	25551	50-008-002	50-007-002	915092
KOMATSU	PC350HD-8		SEALED	1.85	9.92	9.01	B3635	A3541	25551	50-008-002	50-007-002	915092
KOMATSU	PC390LC-10		SEALED	1.85	9.92	9.01	B3635	A3541	25551	50-008-002	50-007-002	915092
KOMATSU	PC400LC-8		SEALED	1.85	9.92	9.01	B3635	A3541	25551	50-008-002	50-007-002	915092
KOMATSU	D85-18	S/N 26513 & DN	SEALED	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915232
KOMATSU	PC-400 EX		SEALED	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915232
KOMATSU	PC400-6		SEALED	1.85	10.00	9.00	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC400LC-7		SEALED	1.85	10.00	9.00	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC400LCSE-7		SEALED	1.85	10.00	9.00	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC450		SEALED	1.85	10.00	9.00	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	PC600	EXC	SEALED	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915232
KOMATSU	D75		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D80		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85-18	S/N 26514 & UP	SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85EX-15		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85PX		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D85PX-15		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D95		SALT	1.85	10.00	8.50	B3635	A3541	25551	50-008-002	50-007-002	915096
KOMATSU	D155-1	S/N 10263-19064	SEALED	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915087
KOMATSU	D155A-1	S/N 2540-10262	SEALED	1.91	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-002	915055
KOMATSU	D155A-2		SEALED	1.91	11.48	9.00	B3815	A3541	25551	50-008-002	50-007-002	915087
KOMATSU	D155A-5		SEALED	1.91	11.48	9.00	B3815	A3541	25551	50-008-002	50-007-002	915167
KOMATSU	D155AX-3		SEALED	1.91	11.48	9.00	B3815	A3541	25551	50-008-002	50-007-002	915167
KOMATSU	D155AX-5		SEALED	1.91	11.48	9.00	B3815	A3541	25551	50-008-002	50-007-002	915167
KOMATSU	D150-1		SALT	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915055
KOMATSU	D155		SALT	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915055
KOMATSU	D155-1		SALT	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915055
KOMATSU	D155A		SALT	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915055
KOMATSU	D135A-1		SALT	1.91	11.58	9.00	B3815	A3541	25551	50-008-002	50-007-002	915087
KOMATSU	D155-1	S/N 19065 & UP	SALT	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915087
KOMATSU	D155A-2		SALT	1.91	11.57	9.00	B3815	A3541	25551	50-008-002	50-007-002	915087
KOMATSU	PC600-6		SEALED	1.92	11.41	9.00	B3815	A3541	25551	50-008-002	50-007-002	915177
KOMATSU	PC600-7		SEALED	1.92	11.41	9.00	B3815	A3541	25551	50-008-002	50-007-002	915177
KOMATSU	PC600LC-6		SEALED	1.92	11.41	9.00	B3815	A3541	25551	50-008-002	50-007-002	915177
KOMATSU	PC600LC-7		SEALED	1.92	11.41	9.00	B3815	A3541	25551	50-008-002	50-007-002	915177
KOMATSU	PC490LC-10		SEALED	1.93	10.16	9.01	B3815	A3541	25551	50-008-002	50-007-002	915167
KOMATSU	D150-1	S/N 6843 & UP	UNSEALED	1.93	11.54	9.00	B3815	A3541	25551	50-008-002	50-007-002	915086
KOMATSU	D155-1	S/N 6843 & UP	UNSEALED	1.93	11.54	9.00	B3815	A3541	25551	50-008-002	50-007-002	915086
KOMATSU	D150-1	S/N 6843 & UP	SEALED	1.93	11.54	9.00	B3815	A3541	25551	50-008-002	50-007-002	915086
KOMATSU	D155-1	S/N 6843 & UP	SEALED	1.93	11.54	9.00	B3815	A3541	25551	50-008-002	50-007-002	915086
KOMATSU	D155AX-6		SALT	1.93	11.42	9.06	B3815	A3541	25551	50-008-002	50-007-002	915330
KOMATSU	D155AX-7		SALT	1.93	11.42	9.06	B3815	A3541	25551	50-008-002	50-007-002	915330



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
KOMATSU	PC600-8		SEALED	1.95	11.42	9.00	B3815	A3541	25551	50-008-002	50-007-002	915177
KOMATSU	D150-1	S/N 6842 & DN	UNSEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D155-1	S/N 6842 & DN	UNSEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D120-15		SEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D120-18		SEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D120-8		SEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D125-18		RECESSED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915206
KOMATSU	D150-1	S/N 6842 & DN	SEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D155		SEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D155-1	S/N 6842 & DN	SEALED	1.99	11.30	9.00	B3815	A3541	25551	50-008-002	50-007-001	915055
KOMATSU	D275AX	Dual Bushing	SALT	2.07	11.43	10.25	B3815	A3541	25501	50-008-002	50-007-001	915093
KOMATSU	D250		RECESSED	2.17	12.32	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915054
KOMATSU	PC850-8R1		SEALED	2.18	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	D275A-5		SALT	2.19	11.40	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915063
KOMATSU	PC600		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	PC650-5		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	PC700		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	PC710		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	PC750SE-6		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	PC800		SEALED	2.19	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	D355		SALT	2.19	12.74	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915091
KOMATSU	D355A-3	S/N 4234 & UP	SALT	2.19	12.74	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915091
KOMATSU	D355A-3	S/N 1632-4233	SEALED	2.19	12.74	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915091
KOMATSU	D355A-5	S/N 4234 & UP	SALT	2.19	12.74	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915091
KOMATSU	PC750		UNSEALED	2.20	12.61	10.25	B3607/8	A3541	25501	50-008-002	50-007-001	915125
KOMATSU	D275AX-5		SALT	2.24	11.36	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	D275A-2		SALT	2.24	12.61	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	D375		SALT	2.24	12.61	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	D375A-1		SALT	2.24	12.61	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	PC1000-1		SALT	2.24	12.61	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	PC1000SE-1		SALT	2.24	12.61	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	D355A-1	S/N 1010-1631	SEALED	2.24	12.58	10.25	B3607/8	A3541	25501	50-020	50-021-1	915088
KOMATSU	D355		FLUSH	2.24	12.58	10.25	B3607/8	A3541	25501	50-020	50-021-1	915053
KOMATSU	PC1000		SEALED	2.24	12.61	10.25	B3607/8	A3541	25501	50-020	50-021-1	915063
KOMATSU	D375A-2		SALT	2.36	12.77	11.04	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	D375A-3		SALT	2.36	12.77	11.04	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1100-6		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1100LC-6		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1100SP-6		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1250		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1250-7		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1250LC-7		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1250LC-8		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	PC1250SP-7		UNSEALED	2.36	12.77	11.03	B3607/8	A3541	25553	50-020	50-021-2	915131
KOMATSU	D375A-6		SALT	2.36	12.63	11.04	B3607/8	A3541	25553	50-020	50-021-2	915276
KOMATSU	D375A-5		SALT	2.36	12.77	11.04	B3607/8	A3541	25553	50-020	50-021-2	915165
KUBOTA	KH170L	EXC	UNSEALED	0.99	5.51	5.31	A3536	A3539	200281	50-008-002	50-007-007	915040
LIEBHERR	R912		SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915002
LIEBHERR	R922		SEALED	1.31	7.00	6.74	A3537	A3540	25499	50-008-002	50-007-005	915002
LIEBHERR	PR711		SALT	1.32	7.22	6.74	A3537	A3540	25499	50-008-002	50-007-005	915052
LIEBHERR	PR721		SALT	1.44	8.12	6.74	B3635	A3540	25500	50-008-002	50-007-004	915052
LIEBHERR	R932		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
LIEBHERR	631	MAY WORK	SALT	1.75	9.06	6.74	B3635	A3540	25548	50-008-002	50-007-002	915003
LIEBHERR	PR731		SALT	1.75	9.06	7.99	B3635	A3540	25548	50-008-002	50-007-002	915003
LINKBELT	LS2800		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009



**WTC Machinery
FP 150 Tooling Chart**

10/17/2025

TRACK TYPE				Pin Dimensions			Disassembly Tools		Assembly Tools			
Make	Model	Comments	Type	Dia	Length	Pitch	Pin Tool	Backing Bushing	Forcing Pin	Track Pin Holder	Pin Adapter	PAT (2)
LINKBELT	LS7800		SEALED	1.44	8.13	6.74	B3635	A3540	25500	50-008-002	50-007-004	915009
LINKBELT	LS9800		SEALED	1.75	9.88	7.99	B3635	A3540	25548	50-008-002	50-007-002	915012
LINKBELT	LS4800		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
LINKBELT	LS5400		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
LINKBELT	LS5800		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915012
LINKBELT	LS6400		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
LINKBELT	LS7400		SEALED	2.00	11.44	9.00	B3815	A3541	25551	50-008-002	50-007-001	915001
MASY.-FERG.	MF2244		RECESSED	0.98	5.42	5.51	A3536	A3539	200281	50-008-002	50-007-007	915057
MASY.-FERG.	MF200B		SEALED	1.06	5.75	5.51	A3536	A3539	200281	50-008-002	50-007-007	915004
MASY.-FERG.	MF300		RECESSED	1.30	6.61	6.30	A3537	A3539	25498	50-008-002	50-007-005	915002
MASY.-FERG.	MF300		SEALED	1.30	6.61	6.30	A3537	A3539	25498	50-008-002	50-007-005	915078
MASY.-FERG.	MF450		RECESSED	1.30	6.61	6.30	A3537	A3539	25498	50-008-002	50-007-005	915002
MASY.-FERG.	MF500		RECESSED	1.38	7.17	6.69	B3635	A3540	25499	50-008-002	50-007-004	915080
MASY.-FERG.	MF400C		SEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915078
MASY.-FERG.	MFD400C		SEALED	1.38	7.01	6.69	B3635	A3540	25499	50-008-002	50-007-004	915078
MASY.-FERG.	MF500B		SEALED	1.44	8.11	6.75	B3635	A3540	25500	50-008-002	50-007-004	915079
MASY.-FERG.	MF600C		SEALED	1.75	8.66	7.98	B3635	A3540	25548	50-008-002	50-007-002	915081
MASY.-FERG.	MFD700C		SEALED	1.88	9.88	8.50	B3815	A3541	25551	50-008-002	50-007-002	915062
MTECK	825E	DRAGLINE	UNSEALED	2.38	12.18	11.02	B3607/8	A3541	25553	50-020	50-021-2	915353
TEREX	82-20AA		RECESSED	1.75	9.19	8.00	B3635	A3540	25548	50-008-002	50-007-002	915075
TEREX	82-30		RECESSED	1.75	9.19	8.00	B3635	A3540	25548	50-008-002	50-007-002	915075
TEREX	82-30AA		RECESSED	1.75	11.52	8.00	B3635	A3540	25548	50-008-002	50-007-002	915021
TEREX	82-30FA		RECESSED	1.75	11.52	8.00	B3635	A3540	25548	50-008-002	50-007-002	915021
TEREX	82-40AA		RECESSED	1.75	11.52	8.00	B3635	A3540	25548	50-008-002	50-007-002	915021
TEREX	82-40CA		RECESSED	1.75	11.52	8.00	B3635	A3540	25548	50-008-002	50-007-002	915021
TEREX	82-30B		RECESSED	2.00	11.52	9.00	B3815	A3541	25551	50-008-002	50-007-001	915077
TEREX	82-40DA		RECESSED	2.00	11.52	9.00	B3815	A3541	25551	50-008-002	50-007-001	915077
TEREX	82-80DA		RECESSED	2.00	12.38	9.00	B3815	A3541	25551	50-008-002	50-007-001	915076
TEREX	TC-12		RECESSED	2.00	12.38	9.00	B3815	A3541	25551	50-008-002	50-007-001	915076
TEREX	82-50		RECESSED	2.38	12.38	10.31	B3607/8	A3541	25553	50-020	50-021-2	915063
TIGER CAT	L870C			1.85	10.04	8.50	B3635	A3541	25551	50-008-002	50-007-002	915189
VOLVO	EC140BLCM		SEALED	1.46	8.37	7.51	B3635	A3540	25500	50-008-002	50-007-004	915106
VOLVO	EC210BP		SEALED	1.46	8.69	7.51	B3635	A3540	25500	50-008-002	50-007-004	915189
VOLVO	EC150LC		SEALED	1.50	8.19	7.50	B3635	A3540	25500	50-008-002	50-007-010	915234
VOLVO	ECR305C		SEALED	1.81	9.99	8.50	B3635	A3541	25551	50-008-002	50-007-002	915311
VOLVO	EC480DL		SEALED	1.85	10.63	8.54	B3635	A3541	25551	50-008-002	50-007-002	915260
VOLVO	EC330BLC		SEALED	1.85	10.02	8.50	B3635	A3541	25551	50-008-002	50-007-002	915092
VOLVO	EC460BLC		SEALED	1.88	11.42	8.54	B3815	A3541	25551	50-008-002	50-007-002	915260
VOLVO	EC700CL		SEALED	2.23	12.60	10.24	B3607/8	A3541	25501	50-020	50-021-1	915261
WIRTGEN	2100		RECESSED	1.33	7.25		A3537	A3540	25499	50-008-002	50-007-005	915272
WIRTGEN	2100		FLUSH	1.45	8.28		B3635	A3540	25500	50-008-002	50-007-004	915272